


2017-26 Up/Downconverter, 2.0 - 2.5 GHz, 140 MHz IF

The 2017-26 Up/Downconverter converts 140 MHz to 2000-2500 MHz (Up) and 2000-2500 MHz to 140 MHz (Down) in 1 MHz steps with low group delay and flat frequency response. Synthesized local oscillators (LO) provide frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm for up and downconverters (red), remote operation (yellow), and upconverter mute (yellow). Gain is manually controlled over a -10 to +30 dB range for the upconverter and over a 0 to +50 dB range for the downconverter as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female (75Ω) for IF and the optional external reference input and output, and BNC female (50Ω) for RF. A high stability (±0.01ppm) option (-H) is also available. The unit is powered by a 100-240 ±10% VAC power supply and housed in a 1.75" X 19" X 16" rack mount chassis.

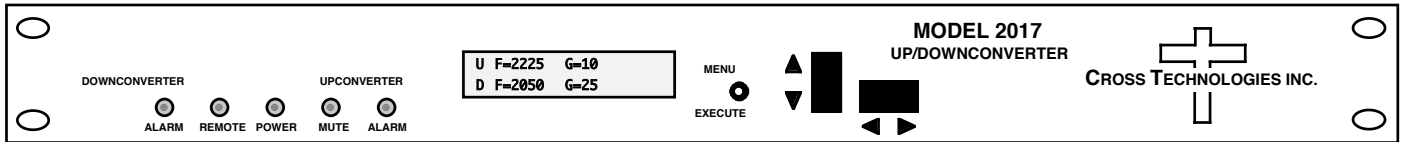

Front Panel

EQUIPMENT SPECIFICATIONS*

UPCONVERTER

Input Characteristics (IF)

Impedance/Return Loss 75Ω /18 dB
 Frequency 140 ± 36 MHz
 Input Level Range -40 to -10 dBm

Output Characteristics (RF)

Impedance/Return Loss 50Ω/12 dB
 Frequency 2.0 to 2.5 GHz
 Output level -20 to 0 dBm
 Output 1 dB compression +5 dBm

Channel Characteristics

Gain range (adjustable) -10 to +30 dB
 Frequency Sense Non-inverting

UP AND DOWNCONVERTER

Channel Characteristics

Frequency Response ±1.5 dB, 2.0-2.5 GHz ; ± 0.75 dB, 72 MHz BW, ± 1.2 dB, 80 MHz BW
 Spurious Response < -50 dBc, in band
 Group Delay, max 0.0035 ns/MHz² parabolic; 0.025 ns/MHz linear; 1 ns ripple

Synthesizer Characteristics

Frequency Accuracy ± 1.0 ppm internal reference (±0.1 ppm, option H)
 Frequency Step 1.0 MHz minimum (125 kHz, **option X**)
 10 MHz In/Out Level 3 dBm ± 3 dB (option E only)
 Phase Noise @ Freq | 100Hz 1kHz 10kHz 100kHz 1MHz
 dBC/Hz | < -70 < -70 < -80 < -95 < -105

Controls, Indicators

Freq/Gain Selection direct readout LCD; manual or remote selection
 Power; Alarm; Up Mute Green LED; Red LED; Yellow LED
 Remote Yellow LED; RS232C, 9600 baud (RS485, option Q)

Other

RF, IF Connectors BNC (female), BNC (female)
 10MHz Connectors BNC (female), 50Ω/75Ω (**option E**)
 Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75"high X 16.0" deep
 Power 100-240 ±10% VAC, 47-63 Hz, 45 W max

DOWNCONVERTER

Input Characteristics (RF)

Impedance/Return Loss 50Ω /12 dB
 Frequency 2.0 to 2.5 GHz
 Noise Figure, max. 15 dB (max gain)
 Input Level Range -70 to -20 dBm
 Input 1dB compression -15 dBm @ 0 dB gain

Output Characteristics (IF)

Impedance/Return Loss 75Ω/18 dB
 Frequency 140 ± 36 MHz
 Output level -20 to -10 dBm
 Output 1 dB compression -5 dBm

Channel Characteristics

Gain range (adjustable) 0.0 to +50.0 dB, 1dB steps
 Image Rejection >50 dB, min.
 Frequency Sense Inverting or Non-inverting (selectable)

Available Options

E - External 10 MHz ref input & output
 H - High Stability (±0.01) Internal Ref
 Q - RS485 Remote Interface
 T - Temperature Sensor
 X - 125 kHz Frequency Steps
 Z - 0.1 dB Attenuator Steps on Upconverter
 Connectors/Impedance
 B - 75Ω BNC (RF), 75Ω BNC (IF)
 D - 50Ω BNC (RF), 50Ω BNC (IF)
 N - 50Ω N-type (RF), 75Ω BNC (IF)
 M - 50Ω N-type (RF), 50Ω BNC (IF)
 S - 50Ω SMA (RF), 50Ω BNC (IF)
 S7 - 50Ω SMA (RF), 75Ω BNC (IF)

*10°C to 40°C; Specifications subject to change without notice

