


## 2017-05 Up/Downconverter, 950-1525 MHz, 140 MHz IF

The **2017-05 L-band Up/Downconverter** converts 140 MHz to 950-1525 MHz (Up) and 950-1525 MHz to 140 MHz (Down) in 1 MHz steps with low group delay and flat frequency response. Synthesized local oscillators (LO) provide frequency selection. Multi-function push button switches select the RF frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), PLL alarm for up and downconverters (red), remote operation (yellow), and upconverter mute (yellow). Gain is manually controlled over a -10 to +30 dB range for the upconverter and over a 0 to +50 dB range for the downconverter as adjusted by the front panel multi-function push-button switches. Remote operation allows selection of frequency and gain. Parameter selection and frequency and gain settings appear on the LCD display. Connectors are BNC female for IF and the optional external reference input and output, and Type F female for RF. LNB or SSPB +24 VDC and 10 MHz reference can be inserted on the RF lines as added options. A high stability ( $\pm 0.01$  ppm) option is also available. It is powered by a 100-240  $\pm 10\%$  VAC power supply & housed in a 1.75" X 19" X 16" 1RU chassis.

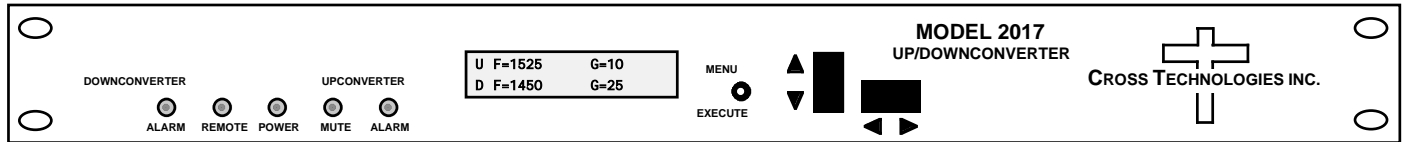

**Front Panel**

### EQUIPMENT SPECIFICATIONS\*

#### UPCONVERTER

##### Input Characteristics (IF)

Impedance/Return Loss 75 $\Omega$  /18 dB  
Frequency 140  $\pm$  36 MHz  
Input Level Range -40 to -10 dBm

##### Output Characteristics (RF)

Impedance/Return Loss 75 $\Omega$ /12 dB  
Frequency 950 to 1525 MHz  
Output level -20 to 0 dBm  
Output 1 dB compression +5 dBm

##### Channel Characteristics

Gain range (adjustable) -10 to +30 dB  
Frequency Sense Non-inverting

#### UP AND DOWNCONVERTER

##### Channel Characteristics

Frequency Response  $\pm 1.5$  dB, 950 to 1525 MHz ;  $\pm 0.5$  dB, 72 MHz BW  
Spurious Response < -50 dBc, in band  
Group Delay, max 0.0035 ns/MHz<sup>2</sup> parabolic; 0.025 ns/MHz linear; 1 ns ripple

##### Synthesizer Characteristics

Frequency Accuracy  $\pm 1.0$  ppm internal reference ( $\pm 0.01$  ppm, **option H**)  
Frequency Step 1 MHz (125 kHz, **option X**)  
10 MHz In/Out Level 3 dBm  $\pm$  3 dB (**option E** only)

Phase Noise @ F (Hz) >	100	1K	10K	100K
dBc/Hz	-70	-80	-90	-100

##### Controls, Indicators

Freq/Gain Selection Direct readout LCD; manual or remote selection  
Power; Alarm; Up Mute Green LED; Red LED; Yellow LED  
Remote Yellow LED; RS232C, 9600 baud (RS485, **option Q**)

##### Other

RF, IF Connectors Type F (female), BNC (female)  
10MHz Connectors BNC (female), 50 $\Omega$ /75 $\Omega$  (**option E** only)  
Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm  
Size 19 inch, 1RU standard chassis 1.75" high X 16.0" deep  
Power 100-240  $\pm 10\%$  VAC, 47-63 Hz, 45 W max

#### DOWNCONVERTER

##### Input Characteristics (RF)

Impedance/Return Loss 75 $\Omega$  /12 dB  
Frequency 950 to 1525 MHz  
Noise Figure, max. 15 dB (max gain)  
Input Level Range -70 to -20 dBm  
Input 1dB compression -15 dBm

##### Output Characteristics (IF)

Impedance/Return Loss 75 $\Omega$ /18 dB  
Frequency 140  $\pm$  36 MHz  
Output level/max linear -20 dBm / -10 dBm  
Output 1 dB compression -5 dBm

##### Channel Characteristics

Gain range (adjustable) 0 to +50 dB  
Frequency Sense Inverting or Non-inverting (selectable)

##### Available Options

E - External 10 MHz ref input & output  
H - High Stability ( $\pm 0.01$ ) Internal Ref  
Q - RS485 Remote Interface  
L - LNB Voltage (+24VDC, 0.4 amps max)  
V - SSPB Voltage (+24VDC, 2.5 amps max)  
T - Temperature Sensor  
X - 125 kHz Frequency Steps  
Z - 0.1 dB Attenuator Steps on Upconverter  
Connectors/Impedance  
B - 75 $\Omega$  BNC (RF), 75 $\Omega$  BNC (IF)  
C - 50 $\Omega$  BNC (RF), 75 $\Omega$  BNC (IF)  
D - 50 $\Omega$  BNC (RF), 50 $\Omega$  BNC (IF)  
N - 50 $\Omega$  N-type (RF), 75 $\Omega$  BNC (IF)  
M - 50 $\Omega$  N-type (RF), 50 $\Omega$  BNC (IF)

\*10°C to 40°C; Specifications subject to change without notice