


## 3116-80-2050 Block Downconverter, 8.0 - 8.5 GHz to 1.80 - 2.30 GHz

The 3116-80-2050 Downconverter converts 8.0 - 8.5 GHz to 1.80 - 2.30 GHz (non-inverted) with a 6.20 GHz local oscillator. The gain is +35 dB maximum and is adjustable in 0.5 ±0.5 dB steps. Front panel LEDs provide indication of Remote operation, PLL Alarm and DC Power. Gain and internal/external/Auto reference frequency selection are controlled by front panel switches or remote selection (via RS-232C/485, standard; Ethernet Optional) and are viewable on the LCD Display. Connectors are Type N female for the RF and BNC female for the L-Band and external reference input and reference output. In AUTO, the 10 MHz reference stays in external if the external level is +3 dBm, ±3 dB. The 3116 is powered by a 100-240 ± 10% VAC power supply, and housed in a 1 3/4" X 19" X 14" rack mount chassis.

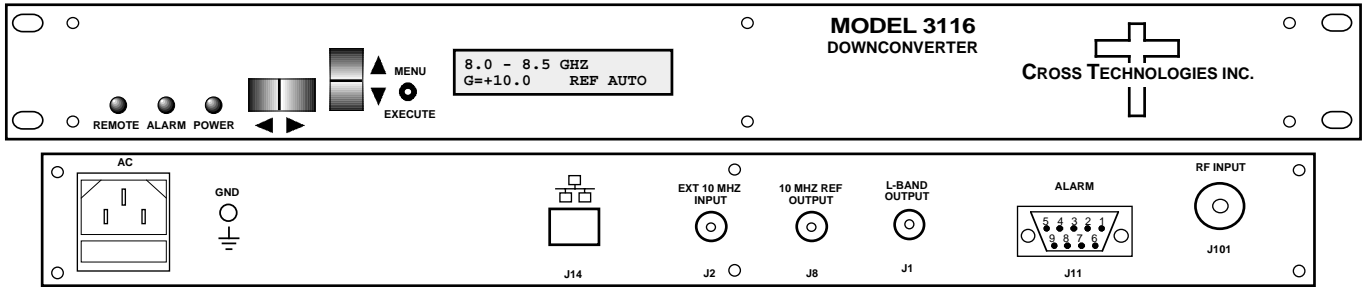

### EQUIPMENT SPECIFICATIONS\*

#### Input Characteristics (RF)

Impedance/Return Loss	50Ω/18 dB
Frequency	8.0 to 8.5 GHz
Noise Figure, Maximum	12 dB max gain
Input Level range	-55 to -35 dBm
Input 1 dB compression	-25 dBm

#### Output Characteristics

Impedance/Return Loss	50Ω / 14 dB
Frequency	1.80 to 2.30 GHz
Output Level Range	-20 to 0 dBm
Output 1 dB compression	+10 dBm at max. gain

#### Channel Characteristics

Gain, max; adjustment	+35 dB ±2 dB, max. gain; 30 dB adjustment in <b>0.5± 0.5 dB</b> Steps
Image Rejection	> 60 dB, min
Spurious, In Band	SIGNAL RELATED<-55 dBC in band, 0 dBm out; SIGNAL INDEPENDENT, <-60 dBm ( <b>1.80-2.30 GHz Out</b> )
Spurious, Out of Band	<-50 dBm ( <b>1.3-1.79 GHz and 2.31-2.8 GHz Out</b> )
Intermodulation	<-55 dBC for two carriers each at -10 dBm out
Frequency Response	ç
Frequency Sense	Non-inverting

#### LO Characteristics

LO Frequency	6.20 GHz
Frequency Accuracy	± 0.01 ppm max over temp internal reference; ext. ref. input
10 MHz In/Out Level	3 dBm, ± 3 dB, w/ Auto-detect

Phase Noise @ F (Hz) >	10	100	1K	10K	100K	1M
Standard dBC/Hz	-55	-70	-80	-85	-100	-110
Opt W87 Enhanced dBC/Hz	-60	-75	-90	-95	-105	-120


#### Controls, Indicators

Gain; Ext Ref Selection	Direct readout LCD; pushbutton switches or remote
Pwr; Alarm; Rem; Mute	Green LED; Red LED; Yellow LED; Yellow LED
Remote	RS232C/RS485/422, 9600 baud (Ethernet Optional)

#### Other

RF Connector	Type N (female), 50Ω
L-Band Connector	BNC (female), 50Ω
10 MHz Connectors	BNC (female), 75Ω, works with 50 or 75 ohms
Alarm/Remote Conn.	DB9 - NO or NC contact closure on Alarm
Size	19 inch standard chassis 1.75" high X 14.0" deep
Power	100-240 ± 10% VAC, 47 - 63 Hz, <b>30 watts</b> max.

### Front and Rear Panel (shown with optional Ethernet)

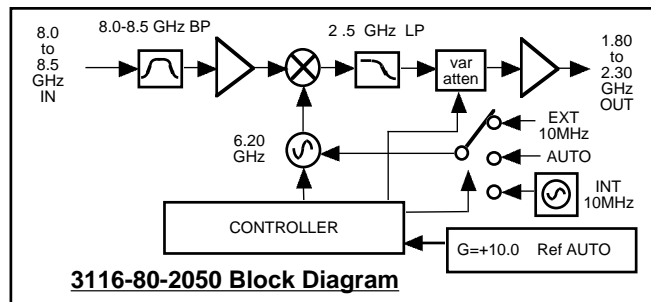

#### Available Options

W31 - 0 to +50 degrees C operation  
W87 - Enhanced Phase Noise

#### Remote M&C Ethernet Options

W8 - Ethernet w/web browser Interface  
W18 - Ethernet w/SNMP (and MIB) Interface  
W28 - Ethernet w/direct TCP/IP Interface

#### Connector Options

N - 50Ω N-type (RF), 75Ω BNC (L-BAND)  
NF - 50Ω N-type (RF), 75Ω F-type (L-BAND)  
NN - 50Ω N-type (RF), 50Ω N-type (L-BAND)  
S7 - 50Ω SMA (RF), 75Ω BNC (L-BAND)  
SF - 50Ω SMA (RF), 75Ω F-type (L-BAND)  
SN - 50Ω SMA (RF), 50Ω N-type (L-BAND)  
SS - 50Ω SMA (RF), 50Ω SMA (L-BAND)

#### Contact Cross for other options

\*10°C to 40°C; Specifications subject to change without notice.