



ALB200-Ku Series 750 W, Ku-Band Antenna Mount TWTA

ALB200-Ku Series, 750 W, Ku-Band, Antenna Mount TWTA

The ALB200-Ku range of Ku-Band TWT amplifiers from Agilis provide over 650 W of output power in a compact, lightweight, rugged, weatherproof, antenna mount enclosure. The advanced packaging and cooling techniques enable the unit to operate in extreme environmental conditions from direct rain to direct sunlight. The amplifiers can be simply deployed anywhere in the world, are user-friendly, and incorporate a comprehensive remote control facility as standard, including RS485 and Ethernet options.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 25 years of experience in the design and manufacture of satellite amplifiers. The company's products have an enviable reputation for performance, robust quality and reliable service.

The ALB200-Ku is available with a wide range of options and accessories, backed by round-the-clock, worldwide technical support.


OPTIONS

- Integral solid-state amplifier (SSA)
- L-band block upconverter
- Gain control (requires SSA)
- Lineariser
- Break-out link for upconverter

FEATURES

- Advanced cooling design enables operation at +55 °C and in direct sunlight.
- Weatherproof antenna mount construction allows exposed mounting.
- CE compliant.
- cETLus listed.
- CB certified.
- Redundant control – contains control and drive circuits for 1:1 redundancy.
- Stand-alone setting – automatically sequences to transmit mode.
- Round-the-clock hotline support.
- Wide range of accessories including: controllers, waveguide networks, cable assemblies.

BLOCK DIAGRAM

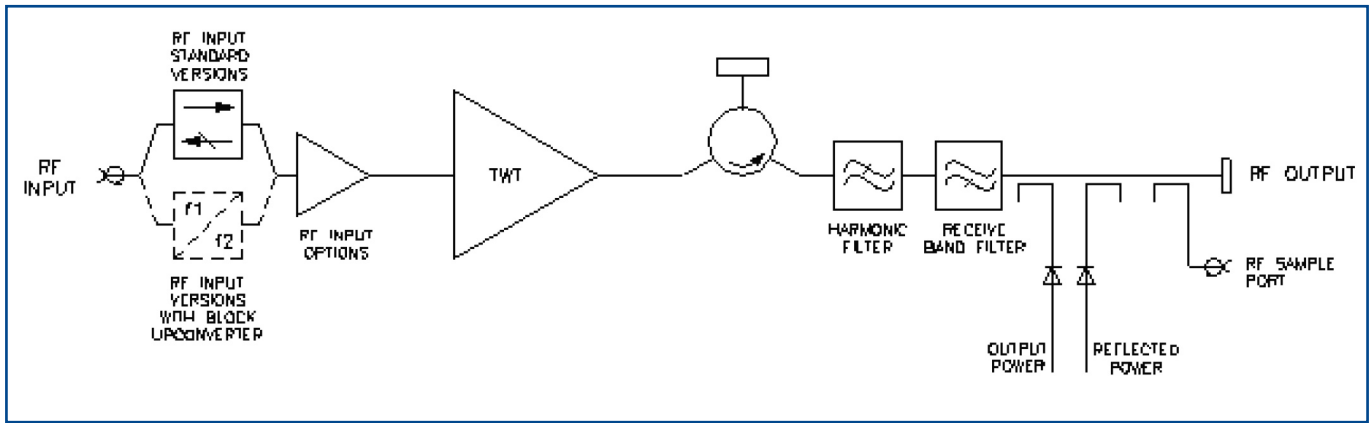

PERFORMANCE (Without Upconverter)

Frequency range:			
standard – KU1	13.75 to 14.5	GHz	
extended – KU2	12.75 to 14.5	GHz	
Output power:			
TWT output flange	750	W min	
HPA rated output	650	W min	
Gain:			
at rated power (A, D, Z option)	70	dB min	
SSG $P_{rated} - 10$ dB (A, D, Z option)	75	dB min	
Attenuation range (D, Z option)	25	dB min	
Gain variation:			
full band	2.5	dB max	
over any 80 MHz band	1.0	dB max	
slope	0.08	dB/MHz max	
Gain stability 24hrs (constant drive, temperature and load)	0.5	dB max	
Gain stability over full operating temperature	2.0	dB max	
Intermodulation (two equal carriers) with total output = $P_{rated} - 4$ dB:			
options A, D	-18	dBc max	
performance with linearised option, Z	-24	dBc max	
Harmonic output	-60	dBc max	
AM to PM conversion at $P_{rated} - 6$ dB	2.5	%/dB	
Noise power:			
transmit band	-70	dBW/4 kHz max	
receive band			
10.95 – 12.75 GHz - standard	-150	dBW/4 kHz max	
10.70 – 11.70 GHz - extended	-150	dBW/4 kHz max	
Residual AM:			
<10 kHz	-50	dBc max	
10 kHz < f < 500 kHz	-20(1.5+log f)	dBc max	
>500 kHz	-85	dBc max	
Group delay:			
linear	0.01	ns/MHz	
parabolic	0.005	ns/MHz ²	
ripple	0.5	ns p-p	
Phase noise:			
continuous 10 dB lower than IESS phase noise profile			
AC fundamental	-50	dBc	
sum of all spurs	-47	dBc	
Input VSWR (operating)	1.3:1	max	
Output VSWR (non-operating)	1.3:1	max	
Load VSWR, no damage	2.0:1	max	

ELECTRICAL

Prime power	single phase, line-neutral or line-line	
Voltage	180 to 265	V
Frequency	47 to 63	Hz
Power requirement	2600 VA	max
Power factor	0.95	min

MECHANICAL

Weight	34.0 kg (75 lb) typ
Dimensions	see outline
Cooling	integral forced-air

CONNECTORS

RF input	N-type female
RF output	PBR120 with 6-32 UNC 2B threaded holes
RF sample port	N-type female
Prime power	ITT Cannon - CGL02A20-3P-E1B-B
Control interface	62GB-12E-2041-PN

Note: Mating connectors for the mains supply and control interface are supplied.

ENVIRONMENTAL

For operation outside these parameters, refer to **Agilis** for guidance.

Operating temperature	-40 to +55	°C
Derating	2 °C/300 m above sea level	(3.6 °F/1000 ft)
Solar gain	1120	W/m ²
Storage temperature	-40 to +80	°C
Relative humidity (condensing)	100	%
Altitude:		
operating	4.5 km (15,000 ft) max	
non-operating	12 km (40,000 ft) max	
Vibration	BS EN 60068-2-64 test Fh, Transportation	
Shock	IEC Publication 68-2-27 Part 2 Test Ea, 25 g	
EMC:		
EN61000-6-3:2001 (Emissions)		
EN61000-6-2:2001 (Immunity)		
FCC CFR47 Part 15B		

CE CERTIFIED

EMC Directive 89/336/EEC, Low Voltage Directive 73/23/EEC.

Note: Safety applies for operating altitude up to 2000 m.




CONTROLS

TYPE	FUNCTION	
REMOTE CONTROL	Off Standby Transmit RF Inhibit	High Power Alarm Set* Low Power Alarm Set* Auto Redundancy Control* RF Switch Control* Gain Control* (when fitted)
REMOTE STATUS/MONITOR	Off Warm-Up Standby Transmit Fault Summary Reflected Power External Interlock TWT Too Hot Mean Helix Current Peak Helix Current High Power Alarm* Low Power Alarm*	Output Power Monitor* Reflected Power Monitor* Helix Current Monitor* Helix Voltage* Collector Voltages* Heater Voltage* Heater Current* Elapsed Hours*
INTERFACES: Serial User	RS-422/485 Dry Relay Contact	
Other Features	Auxiliary Output Voltage Redundant system & waveguide switch drive 'Stand Alone' setting for automatic power-up	

Note: Controls/Monitoring marked* are only available via Serial Interface.

OPTIONS

Extensive options are offered with the **ALB200-Ku** and include; integral pre-amplifiers, gain control, linearisers and block upconverters. The options are defined by adding to the base number as shown below:

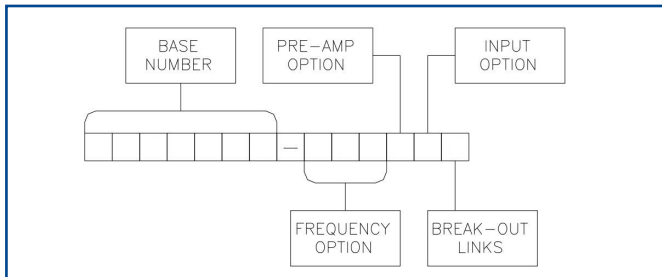

(Consult **Agilis** for availability of options).

Frequency Options

The **ALB200-Ku** is offered in three frequency bands:

KU1 - 13.75 – 14.50 GHz

KU2 - 12.75 – 14.50 GHz

KU3 - 14.00 – 14.50 GHz

Pre-Amp Option

The pre-amp option can be selected from any of the following:

A - Integral solid-state amplifier (typical SSG 78 dB).

D - As option 'A' but includes an attenuator to provide 25 dB (min.) of gain control.

Z - Integral lineariser that improves the linearity of the HPA,

providing a C/I of typically -26 dBc at 4 dB OPBO. The lineariser also incorporates the pre-amp and gain control options.

(Consult **Agilis** for availability).

Input Option

The **ALB200-Ku** can be offered with an L-Band Block Upconverter. Specify:

N - Standard RF

U - L – Ku-Band Block Upconverter (see page 4)

Note: the upconverter requires the inclusion of either the 'D' or 'Z' options. (Consult **Agilis** for availability).

Break-Out Links

Available only with the upconverter option, this enables bypassing of the upconverter and can be used for monitoring, set-up, redundant switching etc. Specify 'S' for Break-Out Links (leave blank if not required).

ACCESSORIES

The **ALB200-Ku** is supplied with an operation manual, prime power connector mating part, interface connector mating part and air cowls. Additional accessories include:

- **Override Controller**

Provides automatic power-up for 'emergency' situations.

- **1:1 Control Unit**

Provides control of 2 HPA's in 1:1 switch configuration. (The waveguide switch network can also be supplied).

- **Cable Assemblies**

For connecting **ALB200-Ku** to controllers and waveguide switches.

- Additional mains connector parts.
- Additional interface connector parts.

For more information on accessories, contact **Agilis**.

PERFORMANCE WITH INTEGRAL BLOCK UPCONVERTER

Output frequency range:

option KU1	13.75 to 14.5	GHz
option KU3	14.0 to 14.5	GHz

L-band input:

frequency range option KU1	950 to 1700	MHz
frequency range option KU3	950 to 1450	MHz
level	10	dBm max

LO frequency:

option KU1	12.8	GHz
option KU3	13.05	GHz

External reference (see note):

frequency	10	MHz
level	-3 to +7	dBm
impedance	50	Ω

Output power:

TWT output flange	750	W min
HPA rated output	650	W min

Gain:

at rated power (D, Z option)	70	dB min
SSG Prated -10 dB (D, Z option)	75	dB min
Attenuation range (D, Z option)	25	dB min

Gain variation:

full band	4.0	dB max
over any 40 MHz band	1.5	dB max
slope	0.08	dB/MHz max

Gain stability 24hrs (constant drive, temperature and load)..... 0.5 dB max

Gain stability over full operating temperature..... 2.0 dB max

Intermodulation (two equal carriers) with total output = $P_{rated} - 4$ dB:

options C, A, D	-18	dBc max
performance with linearised option, Z	-24	dBc max

Harmonic output -60 dBc max

AM to PM conversion at $P_{rated} - 6$ dB 2.5 %/dB

Noise power:

transmit band	-70	dBW/4 kHz max
receive band (10.95 – 12.75 GHz)	-150	dBW/4 kHz max

Residual AM >100 kHz from carrier	-60	dBc max
Group delay:		
linear	0.01	ns/MHz
parabolic	0.005	ns/MHz ²
ripple	0.5	ns p-p
Phase noise:		
Continuous	meets IESS phase noise profile	
AC fundamental	-50	dBc
Sum of all spurs	-47	dBc
Input VSWR (non-operating)	1.6:1	max
Output VSWR (non-operating)	1.3:1	max
Load VSWR, no damage	2.0:1	max

Note: the BUC can be operated without the external reference, typical frequency stability ± 0.25 ppm.

HEALTH AND SAFETY HAZARDS

Stellar satellite amplifiers are safe to handle and operate provided that the relevant precautions are observed. Agilis does not accept responsibility for damage or injury resulting from the use of electronic devices it produces.

High Voltage

Dangerous voltages are present within the TWT amplifier when operating normally. However, the equipment is designed so that personnel cannot come into contact with high voltage circuits unless covers are removed.


RF Radiation

All RF connectors must be correctly fitted before operation.

Beryllia

The TWT in the amplifier contains beryllium oxide ceramic parts. These are not accessible unless the TWT casing is damaged. Consult Agilis regarding the disposal of damaged or life-expired tubes.

OUTLINE

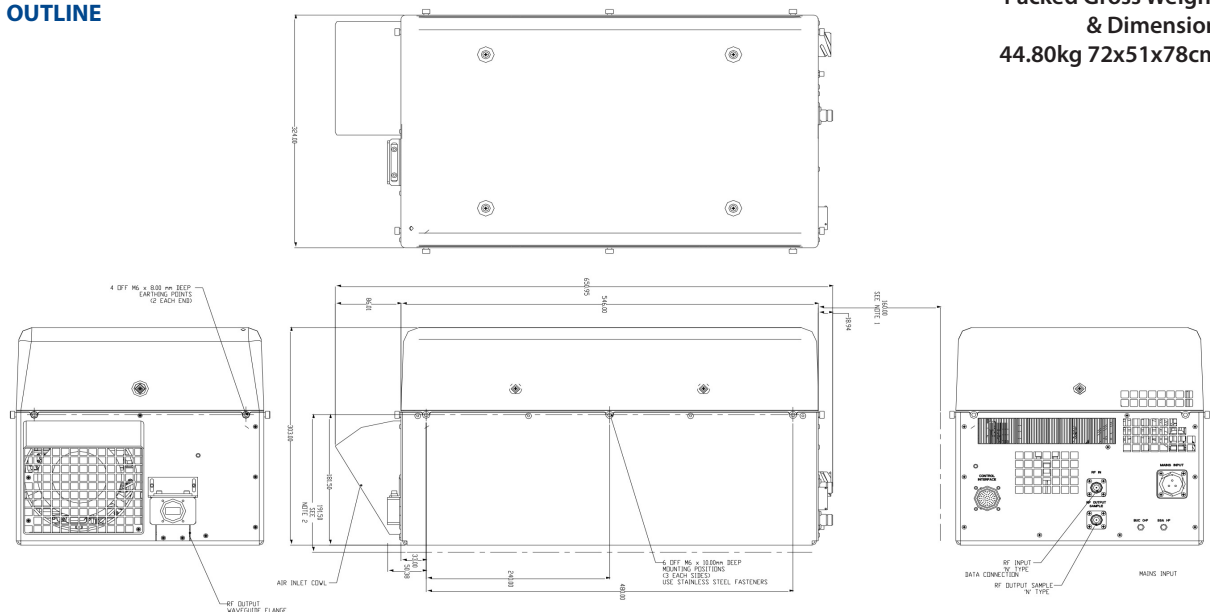

Packed Gross Weight & Dimension
44.80kg 72x51x78cm

Whilst Agilis has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. Agilis accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.

Note: All specifications are subject to change without notice.
 Rev. 270515

Request A Quote

