


Model ASC300Ku-E (External BDC) Beacon Tracking Receiver

Quality Products @ Reasonable Prices

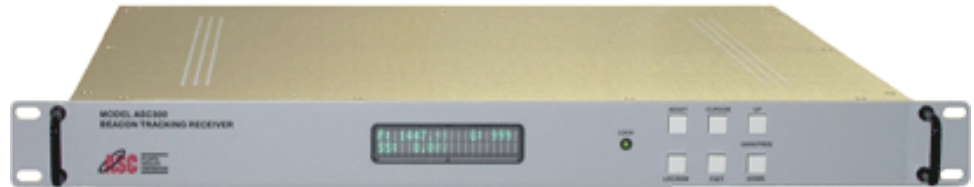

Functional Description

The Model **ASC300Ku-E Beacon Tracking Receiver** is a high performance unit that is designed to real time track the power density of a satellite beacon and output a DC voltage that is linearly proportional to the beacon power by utilizing a true, RMS-responding power detector. The **ASC300Ku-E will tune over any of the three primary Ku band satellites (10.7-11.70 GHz, 11.70-12.20 GHz, 12.25-12.75 GHz) by utilizing an external block down converter. The frequency band must be customer specified. The applications for the ASC300Ku-E are for antenna tracking controllers and uplink power control system.**

Systems Specifications

Input Frequency Customer Specified
 External Block Converter
 Pre-detection Bandwidth 60 kHz
 Input Level -90 dBm, min.; -30 dBm max.
 For full tracking range capability
 Frequency Tuning..... 10 kHz Steps
 Frequency Adjust..... Front Panel or remotely
 AFC ± 30 kHz
 Threshold..... <45 dB-Hz (C/N_0) for acquisition
 Input Impedance..... 50 Ohm
 Input Connector..... Type-N, Female (**SMA Optional**)
 Output Impedance..... 100 Ohm, single ended
 Output Connector..... Terminal plug and BNC Female
 Tracking Gradient..... 0.5 V/dB, Std
 Tracking Response 0 to +10 VDC for a
 20 dB input level change
 System Level Adjust..... 0 to 60 dB, 0.5 dB Steps
 Frequency Stability..... <1 ppm, 0^oc to +50^o c
 Frequency Reference..... 10 MHz (Internal)

Phase Noise..... >75 dBc-Hz, 1 kHz from Carrier
 Alarms Unit Lock
 Alarm Relay Form-C
 External LNB Power..... +24 VDC, switchable In-Out
 500 ma Max.
 CDS (**Optional**) DB-9, RS-232
 Front Panel Display..... Vacuum Fluorescent
 M&C RS-232 or RS-422/485 Switchable
 on rear panel.
 M&C Connector DB-9, Female
 Ethernet 10/100 Base T (**Optional**) RJ-45 Connector

Physical Characteristics

Size 1.75"H X 16.00"D X 19.00"W
 Weight..... 8 lb. (3.63 kg)
 Primary Power 90 - 264 VAC 47 - 63Hz, 1.4 A
 Auto-Sensing

Environmental Specifications:

Operating Temperature..... 0^oc to +50^o c
 Storage Temperature..... -40^oc to +70^o c
 Humidity 95% RH@ 40^o c

Band 1 (10.7 to 11.70 GHz)
Band 2 (11.70 to 12.75 GHz)

CDS Continuous Digital Streaming (Optional)

The streaming option associated with the ASC300 series of beacon tracking receivers provides a continuous, two byte, data stream running at 9600 baud that contains ten bits of signal strength level indication as well as lock or alarm condition of the unit. A female DB9, interface connector on the rear of the unit is specifically dedicated for this option.

Request A Quote