


2016-75-213 Downconverter, 719 MHz to 201 or 213 MHz

The 2016-75-213 Downconverter converts **719 MHz** to **201 or 213 ± 3 MHz** with low group delay and flat frequency response. Synthesized local oscillators (LO) provide output frequency selection. Multi-function push button switches select the output frequency, gain, and other parameters. Front panel LEDs provide indication of DC power (green), remote operation (yellow), and PLL alarm (red). Variable attenuators for the RF input provide a gain range of 0 to **+40 dB** as adjusted by the front panel multi-function pushbutton switches. Remote operation allows selection of output frequency and gain. Parameter selection and frequency translation and gain settings appear on the LCD display. Connectors are Type F female for the RF and BNC female for IF and optional 10 MHz input and output signals (option -E). A high stability (± 0.01 ppm) (option -H) is also available. The unit is powered by a 100-240 \pm 10% VAC power supply, and housed in a 1 3/4" X 19" X 16" rack mount chassis.

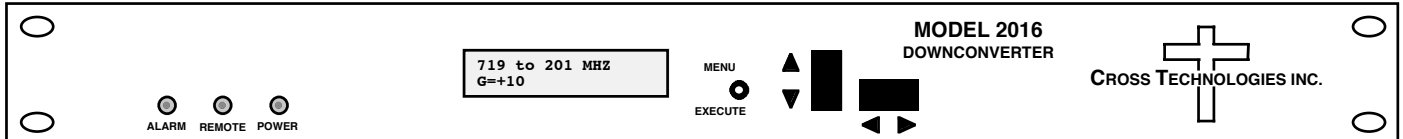

Front Panel

EQUIPMENT SPECIFICATIONS*

Input Characteristics (RF)

Impedance/Return Loss 75Ω / 12dB
 Frequency **719 MHz ± 3 MHz**
 Noise Figure, max. 15 dB (max gain)
 Level Range **-60 to -20 dBm**
 Input 1dB compression -15 dBm

Output Characteristics (IF)

Impedance/Return Loss 75Ω / 12dB
 Frequency **201 or 213 ± 3 MHz**
 Level Range -30 to -20 dBm
 Output 1 dB compression -15 dBm

Channel Characteristics

Gain range (adjustable) 0.0 to **+40.0 dB**
 Image Rejection > 50 dB, min.
 Frequency Response **201 or 213 ± 3 MHz out** ; ± 0.5 dB
 Spurious Response < -45 dBC, in band
 Group Delay, max 0.01 ns/MHz² parabolic; 0.03 ns/MHz linear; 1 ns ripple
 Frequency Sense **Non-inverting**

Synthesizer Characteristics


Frequency Accuracy ± 1.0 ppm internal reference (± 0.01 ppm, **option H**)
 Frequency Step None, 201 or 213 MHz out, selectable
 10 MHz In/Out Level **+3 dBm ± 3 dB (option E)**
 Phase Noise @ Freq | 100Hz 1kHz 10kHz 100kHz 1MHz
 dBC/Hz | < -70 < -70 < -80 < -95 < -110

Controls, Indicators

Freq/Gain Selection direct readout LCD; manual or remote selection
 Pwr; Alarm; Rem; Mute Green LED; Red LED; Yellow LED; Red LED
 Remote RS232C, 9600 baud (RS485, **option Q**)

Other

RF, IF Connectors Type F, BNC (female)
 10MHz Connectors BNC (female), 50Ω/75Ω (**option E**)
 Alarm/Remote Connector DB9 (female) - NO or NC contact closure on Alarm
 Size 19 inch, 1RU standard chassis 1.75" high X 16.0" deep
 Power 100-240 \pm 10% VAC, 47-63 Hz, 45 W max

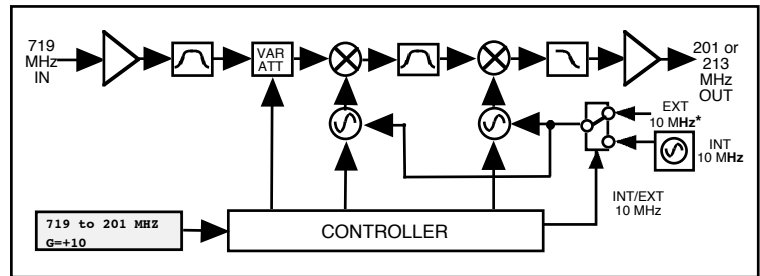

Block Diagram

Available Options

E - External 10 MHz ref input & output
 H - High Stability Internal Ref (± 0.01 ppm)
 Q - RS485 Remote Interface
 X - 125 kHz Frequency Steps
 Connectors/Impedance
 B - 75Ω BNC (RF), 75Ω BNC (IF)
 C - 50Ω BNC (RF), 75Ω BNC (IF)
 D - 50Ω BNC (RF), 50Ω BNC (IF)
 N - 50Ω N-type (RF), 75Ω BNC (IF)
M - 50Ω N-type (RF), 50Ω BNC (IF)
 S - 50Ω SMA (RF), 50Ω BNC (IF)

*10°C to 40°C; Specifications subject to change without notice

