



Ku-Band Synthesized Frequency Converter



Dual with Trays
FCS300T

Features

- Two hot swappable converters in 1U
- Outperforms IESS 308/309 phase noise by 3dB
- Superior linearity
- 125 kHz step size
- On-site reference aging correction capability
- Intuitive front panel user interface
- RS232 terminal and RS485 packet mode remote interface)

Overview

The Advantech Dual - HP range of converters uses the latest technology in conversion, giving two independent conversion chains in 1 RU package, local and remote control thus providing the ultimate in performance and user friendly operation at a very competitive price.

The spectral purity, low phase noise and stability exceed the requirements of all major international satellite network operators.

The hot swappable feature provides for the ultimate flexibility in a very compact package.

The flexible and comprehensive monitor and control features on the HP converter ensure that it will fit into any network management system architecture. The user-friendly front panel or the RS485 remote interface will provide full set-up and fault monitoring facilities. The RS232 will provide the Monitor and Control functions via a PC and will also allow for software downloading.

The converter uses a PLL oscillator either locked to a highly stable internal 10 MHz reference or if the external reference option is fitted and the proper level of signal is present, the PLL oscillator will automatically lock to the external reference.

Options

- 140 MHz IF Frequency
- Ethernet port and SNMP Interface
- Low Group Delay (option)
- 10 MHz External/Internal Reference with Autosensing
- 1kHz step size


Operating Bands

Up-Converters		
Model Number	RF Output	IF Frequency
ARUD-70KST	14.00 – 14.50 GHz	70 MHz
ARUD-70KXT	13.75 – 14.50 GHz	70 MHz

Down-Converters		
Model Number	RF Output	IF Frequency
ARDD-K1 70 T	10.95 – 11.70 GHz	70 MHz
ARDD-K2 70 T	11.70 – 12.20 GHz	70 MHz
ARDD-K3 70 T	12.25 – 12.75 GHz	70 MHz
ARDD-K4 70 T	10.70 – 11.70 GHz	70 MHz
ARDD-K5 70 T	11.70 – 12.75 GHz	70 MHz

Application

The HP range of converters is particularly suited for use in VSAT, SCPC Networks, SNG, DVB-RCS and Hub systems where compact redundancy is required. This makes them an ideal choice for large earth stations requiring cost effective solutions for frequency conversion. The lightweight, rugged and compact design also ensures that the HP converter provides the ideal solution for mobile truck or flyaway DSNG systems. With fully welded aluminum chassis and robust modular internal construction the converter can even meet the demands of military installations. The HP range of converters provides an industry leading MTBF of over 120,000 hours.

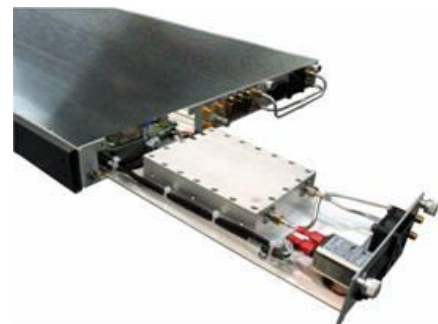



Ku-Band Synthesized Frequency Converter

Technical Specifications					
Up-Converter			Down-Converter		
IF Input			RF Input		
Frequency range	70 ± 18 MHz or 140 ± 36 MHz (optional)		Frequency range	(See table on front page)	
Impedance	50 Ω		Impedance	50 Ω	
Input Connector	SMA (female)		Input Connector	SMA (female)	
Return loss	18 dB		Return loss	16 dB	
RF Output			IF Output		
Frequency range	(See table on front page)		Frequency range	70 ± 18 MHz 140 ± 36 MHz (optional)	
Output level	+10 dBm at P1dB		Output level	+5 dBm at P1dB	
Output connector	SMA (female)		Output Connector	SMA (female)	
Connector Impedance	50 Ω		Connector Impedance	50 Ω	
Return loss	16 dB		Return Loss	18 dB	
Transfer Characteristics			Transfer Characteristics		
Maximum Conversion Gain	20 dB (standard) 30 dB (option)		Conversion Gain	40 dB	
Gain adjustment	20 dB (0.1 dB step size)		Gain adjustment	20 dB (0.1 dB step size)	
Gain flatness	1.5 dB p-p max. 36 MHz		Gain flatness	1.5 dB p-p max. 36 MHz	
	2.0 dB p-p max. 72 MHz			2.0 dB p-p max. 72 MHz	
Gain stability	±0.25 dB max. /24 hours		Gain stability	±0.25 dB max. / 24 hours	
	±1 dB over temp. range			±1 dB over temp. range	
Spurious	< -55 dBc related @ 0 dBm output < -55 dBm non-related		Spurious	-55 dBc @ -5 dBm output	
IMD3 (two tone)	-40 dBc max @ 0 dBm output		IMD3 (two tone)	-40 dBc max @ -5 dBm output	
			Image rejection	60 dBc	
			Noise Figure	20 dB	
Group delay			8 ns p-p typical		
Group delay option	36MHz	Linear 0.03 ns/MHz	Parabolic 0.01 ns/MHz ²	Ripple	1 ns p-p
	72MHz	Linear 0.025 ns/MHz	Parabolic 0.003 ns/MHz ²	Ripple	1 ns p-p
Phase noise (dBc/Hz)	100Hz	1kHz	10kHz	100kHz	
	-63	-73	-83	-93	
Synthesizer step size			125k kHz		
Reference			Mechanical		
External Reference	10 MHz, +/- 5 dBm input level		Dimensions	Width 19" (482.6 mm)	
Internal reference stability	± 2 × 10 ⁻⁸ over 0°C to +50°C			Height 1U 1.75" (44.5 mm)	
Aging	± 2 × 10 ⁻¹⁰ / day ± 5 × 10 ⁻⁸ / year			Depth 28" (711.2 mm)	
Environmental			Power Supply		
Operational	0°C to +50°C standard		Voltage	90 – 265 VAC (47 – 63 Hz)	
Storage	-55°C to +85°C		Power	50W (typical)	
Humidity	Non-condensing		Connector	IEC 603320 10A	
Altitude	3,000m AMSL		Monitor and Control		
			RS 485	DB9	
			RS 232	DB9	
			Discrete	DB9	
			Ethernet (optional)	RJ45 F (optional)	

Request A Quote