

# ALB129 Series

Compact 80W/100W  
Ku-Band Block-Up Converter

This small and lightweight BUC is ideal for mobile and satellite uplink applications.

The BUC has “Best in Class” efficiency and “lowest power consumption.” The unit works on a wide range AC power supply of 96VAC to 264VAC. Innovative and efficient thermal design makes this BUC one of the smallest, robust, reliable and rugged enough to withstand outdoor conditions in the industry.

Built-in redundancy feature eliminates the use of an external controller for 1:1 redundancy operation. This eliminates messy cabling at the antenna making this a very elegant solution.

Extensive M/C interface with RS232/RS485/Ethernet (SNMP & HTTP), Bluetooth and Wifi.

## Features

- Compact and lightweight
- Available in standard and extended Ku-Band
- Forward & reverse power detection\*
- Input power detection\*
- Intuitive monitoring & control through RS232/RS485 & Ethernet (SNMP & HTTP), Bluetooth and Wifi.
- Automatic fault identification & alarm generation
- Temperature compensation facility
- Built-in redundancy facility
- Built-in 10MHz reference with auto-detection\*
- Wide operating temperature range -40°C to +60°C
- RoHS Compliant
- Waterproof

## Quality Assurance


100% of all BUCs go through stringent quality checks in addition to well defined Electrical Stress Screening to ensure operation in harsh outdoor environments. The BUCs are also subjected to seal test for water ingress verification.

## Reliability

Field proven under harsh environment conditions, Agilis ODU's can withstand temperature ranging from -40°C to +60°C with up to 100% humidity.

# ALB129 Series

Compact 80W/100W  
Ku-Band Block-Up Converter

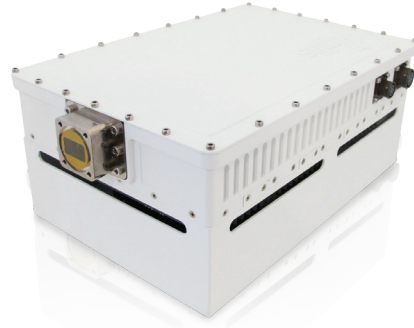

## Technical Specifications

### RF Specifications

Transmit Frequency	14.00GHz – 14.5GHz 13.75GHz – 14.5GHz
IF Frequency Range	950MHz – 1450MHz 950MHz – 1700MHz
LO Frequency	13.05GHz 12.80GHz
Output Power	
80W	49dBm (P1dB)
100W	50dBm (Psat)
Spectral Re-growth	30dBc @ Single carrier 2dB below P1dB at 1.0 x symbol rate offset for OQPSK or QPSK
Third Order Intermod (two tone)	-25dBc @ two carrier 2MHz apart at P1dB
Small Signal Gain	
80W / 100W	70dB Min
Gain Flatness Full Band	±2dB
Gain Slope over 40MHz	±1dB
Gain Variation over temperature	±2dB @ from -40°C to +60°C
Gain Control	20dB in step of 0.5dB
O/P spurious	According to EN301428
Phase Noise @ Offset	
1KHz	-73dBc/Hz
10KHz	-83dBc/Hz
100KHz	-93dBc/Hz
I/P VSWR	1.3:1
O/P VSWR	1.25:1
Noise Power Density Tx BD	70dBW/4KHz
Rx BD	142dBW/4KHz

### Power Requirement

Prime Power	230VAC (range 96V to 264VAC)
Power Consumption	
80W / 100W	550VA Typical

### Interfaces

IF Input Interface	50Ohms N-type Female
Output Interface	WR 75G

### External Reference

Frequency	10MHz
Power	-5dBm to +5dBm
Internal reference	Built-in (Auto detection)*
External reference phase noise	
Requirement @ frequency offset	
1KHz	-150dBc/Hz
10KHz	-155dBc/Hz
100KHz	-160dBc/Hz

### Monitor And Control

Monitor	BUC temperature Status alarm Output power Reverse power* Input power* LED status indication
Control	Attenuation RF output mute
Interface	RS232/RS485 & Ethernet (SNMP & HTTP) Bluetooth / WIFI (Optional)
Tx Redundancy	Built-in

### Environmental

Operating Temperature	-40°C to +60°C
Humidity	Up to 100% Weather protection sealed to IP65

### Mechanical

Size	
80W / 100W	360L x 200W x 145H mm
Weight	
80W / 100W	9.5kg
Color	White Powder Coat

### Compliance Standard

IEC 609501-2nd Edition	International Safety Standard for Information Technology Equipment
ETSI EN 301 489-12	Electromagnetic Compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) Standard for radio equipment and services; Part 12: Specific conditions for Very Small Aperture Terminal, Satellite Interactive Earth Stations operated in the frequency ranges between 4GHz and 30GHz in the Fixed Satellite Service (FSS)
ETSI EN 301 489-1	Electromagnetic Compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility Standard for Radio Equipment and Services
FCC Class A	Two levels of radiation and conducted emissions Limits for unintentional radiators (FCC Mark)

Note: All specifications are subject to change without notice.  
Rev. 270615

\*Feature subject to model number and customer requirement

Request A Quote

Agilis