

## SNG SERIES




## Rack Mount Spectrum Analyzer

- Simple And Easy To Use Design At A Low Price
- 10 Customizable Presets
- VGA Color Display
- Fits Into Tektonix 1700 Series Dual Mount Tub
- Fast Refresh Rates Up To 13/sec
- Full Remote Control Monitoring Via RS-232 Using Free Remote Control Software (GUI)
- Up To 6 Customizable Inputs Available
- L.O. Frequency Offsets For Direct Frequency Readout
- 50 User Memory Locations
- Options Include Rackmounts, Extended Amplitude Range Solutions, Down Converters For Extended Frequency Coverage, And LNB Power

### Direct Replacement for TEK 1705A

Designed for satellite news gathering, the SNG is an excellent, cost effective upgrade to the discontinued Tektronix 1705A with a feature set that is second to none, giving the Satellite Technician a very useful tool for finding and peaking on satellites. The SNG is not only a spectrum analyzer but also a carrier monitor. The SNG also offers L.O. Frequency Offsets which allows the operator to display the frequency in L-Band, C-Band, Ku-Band, or any custom band needed.

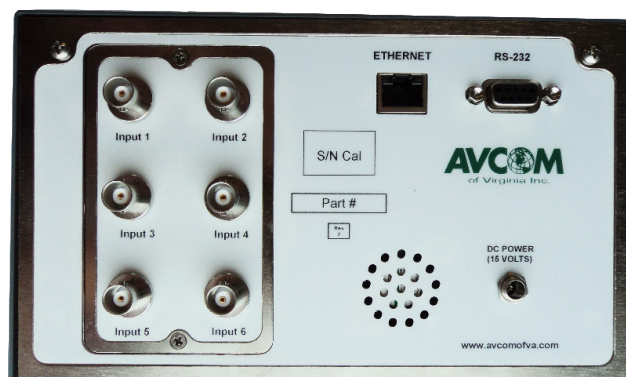

(Rear view of SNG-2500C-6BL)



### Improved Performance & Specifications

The SNG is designed for the measurement of communications and broadcast carriers, making uplink, downlink, L-band carriers, IF, and 10MHz reference signals easy to monitor and measure. The SNG provides excellent frequency and amplitude accuracy along with RBW selection from 10kHz to 1MHz. This is required to allow viewing and monitoring of small Telemetry, Tracking, Command Systems (TT&C), and data carriers found in many satellite communications markets today. The front panel can control Frequency & Span with settings for Fine, Medium, and Coarse to allow the operator to dial into the carrier and control the display as needed. The use of persistence, averaging, or waterfall tools allow periodic signals like TDMA or noisy carriers to be more easily detected.


### Options

- Up to six inputs in any combination (BNC, F, TNC, SMA, and N available)
- Preamp (-70dBm Reference Level)\*
- Attenuator (+10dBm Reference Level)\*
- LNB can be added to Inputs 1-4\*
- Microwave Down Converters
- RMT-45 Rackmount
- QRM-SNG Rackmount

\*Available on inputs, individually

Accessories include universal AC adaptor (100 to 240Vac), AC cord, and software.

**A mini version of this unit is available! Ask for more information.**

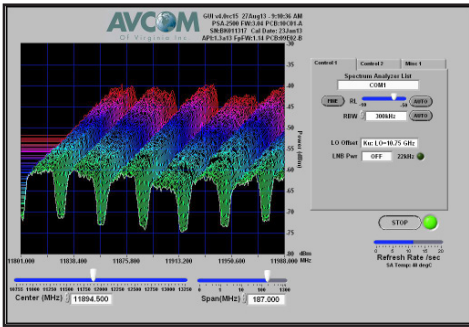

## Versatile Remote Control Software

The SNG can be monitored and controlled both locally from the front panel and remotely using the Avcom Remote Control Software via serial port or optional Ethernet. The Remote Control Software has an intuitive user interface that is easy to use with no special training required. It allows remote monitoring and control from your network or over the internet. Features include screen shot capture recording, SNMP for alarm/monitoring, cross-polling, markers, and Automated Data Acquisition (DAQ) with tolerance comparison, and integrated email alerts to name a few. Up to twelve windows can be displayed at one time. The Remote Control Software is available for Windows, Mac, and Linux.

## TECHNICAL SPECIFICATIONS

<b>FREQUENCY RANGE:</b>	SNG-2500C: 5MHz – 2,500MHz
<b>SPAN WIDTH:</b>	Up to 1300 MHz (Dependent on Center Frequency)
<b>RESOLUTION BANDWIDTH:</b>	10KHz, 100KHz, 300KHz, 1MHz
<b>RF SENSITIVITY:</b>	Greater than -85 dBm Typical
<b>REFERENCE LEVELS:</b>	Selectable -10 dBm, -30 dBm, & -50dBm (front panel) (5dBm increments in GUI)
<b>SCALE:</b>	5 dB/Div & 2 dB/Div
<b>DYNAMIC RANGE:</b>	40 dBm on Application Window (50dBm GUI window)
<b>AMPLITUDE ACCURACY:</b>	± 1 dB typical
<b>FREQUENCY ACCURACY:</b>	± 1KHz typical
<b>MAX RF INPUT:</b>	25 VDC MAX (DC Blocked), +30dBm (1W)
<b>INPUT IMPEDANCE:</b>	50 Ω
<b>AMPLITUDE RANGE:</b>	0 dBm to -85 dBm (standard) 0 dBm to -105 dBm (preamp option) +10 dBm to -65 dBm (attenuator option)
<b>INPUT CONNECTOR:</b>	Input 1: "BNC" is standard. F, TNC, SMA, N available. Inputs 2-6: Optional
<b>LNB POWER:</b>	13-18V, 22kHz (Optional)
<b>OPERATING TEMPERATURE RANGE:</b>	-10°C to +60°C
<b>SIZE:</b>	16.75" L x 8.375" W x 5.0" H
<b>WEIGHT:</b>	5lbs
<b>POWER REQUIREMENTS:</b>	+15 VDC @ 1 amp typical
<b>DISPLAY:</b>	5.7" TFT-LCD, 640x480 (VGA), 16-Bit RGB

Specifications subject to change. ©2015 Avcom of Virginia, Inc. v011515

Request A Quote