


2000-3XX SSPB Power Supply

The 2000-3XX SSPB Power Supply is a switching power supply which provides regulated +18 VDC (-318) OR +24 VDC (-324) at 2.5 amps through RF connectors for insertion on an RF line. Also provided is a BNC connector for insertion of a 10 MHz reference signal on the RF line. The input AC connector is IEC 320 C13. The 2000-3XX can be mounted on an optional 1 3/4" X 19" rack mount panel (**option -R**).

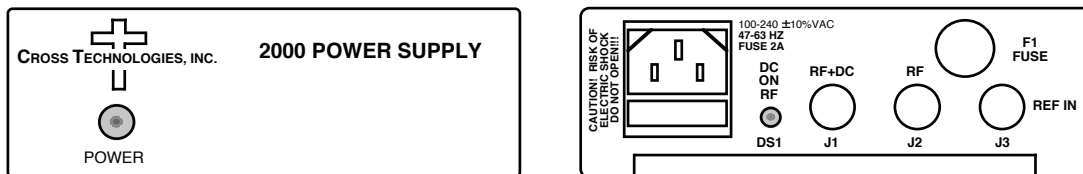

Front and Rear Panels

EQUIPMENT SPECIFICATIONS*

RF Input/Output Characteristics

Impedance/Return Loss	75Ω/14 dB
Frequency	950 - 2150 MHz
Insertion Loss	1 ± 0.5 dB
Frequency Response	±1.0 dB

AC Input Characteristics

Voltage	100 - 240 ± 10% VAC
Frequency	47 - 63 Hz
Power, maximum	65 watts

DC Output Characteristics

Voltage / Current	+18 VDC/ 2.5 amps (Model 2000-318) +24 VDC/ 2.5 amps (Model 2000-324)
Load Regulation, max.	± 5%
Power Supply type	Switcher
Switching Frequency	50 kHz, typical

Indicators

DC Power (front)	Green LED
DC Power Insertion (rear)	Yellow LED

Other

AC Input Connector	IEC 320 C13
RF Connectors	Type F (female)
10MHz REF Connector	BNC (female), 50Ω/75Ω
Size, Bench Top	4.7" wide X 1.75" high X 8.5" deep
Size, Rack Mount	19 inch standard chassis 1.75"high X 9.0" deep (option R)

Options

R, R2, R3	Rack Mount Panel (1, 2, or 3 position)
Connectors/Impedance	
B	75Ω BNC (RF)
D	50Ω BNC (RF)

*+10°C to +40°C; Specifications subject to change without notice

[Request A Quote](#)