


## 2082-1972 DC Power Supply

The 2082-1972 DC Power Supply is a DC voltage Power Supply used for SSPB and LNB applications. DC Power is inserted via two L-Band loop-throughs and a +48 VDC, 8A output is provided on the SSPB AUX output. The two L-Band loop-throughs provide a +18 VDC, 1A output is provided on the Antenna LNB output and either +18VDC @ 3A or +48VDC @ 5A is provided on the Antenna BUC output. The unit facilitates the installation of a *TracStar*® Antenna Controller and provides the +29V 150W needed with all of the *TracStar*® Connectors accessible through the rear panel. Front panel locking toggle switches allow the user to independently disable the DC power on either L-Band loop-through, the SSPB Aux DC output and the *TracStar*® antenna controller. The user is also able to select +18VDC or +48VDC insertion on the BUC TX loop-through. Primary power is either 19-72VDC or 90-264 VAC. If both primary power sources are connected the user can select which will be enabled and the other source will be put in a standby mode and serve as a backup power source. If only one primary source is connected, the 2082-1972 Power Supply will use the available power source regardless of the selected primary power source switch position. Each DC power source is fused using rear panel mount fuse holders. Front panel LEDs indicate AC or DC primary power (green), and Standby (yellow). DC output indications are provided for all four outputs (three outputs and the *TracStar*® antenna controller). Front panel LEDs (green) and rear panel LEDs (yellow) indicate the presence of voltage on LNB, BUC, SSPB Aux and the *TracStar*®. Front panel LEDs (yellow) indicate the output is in a Standby condition. Front panel LEDs (red) indicate an Alarm condition which is the result of a blown or missing fuse. The alarm condition will only occur if the output is enabled. Front panel test points are provided for each of the four output voltages and ground. All loop-through connectors are TNC female. The unit is housed in a 19.0", 2RU x 3.50"H x 12.00"D\*\* chassis.

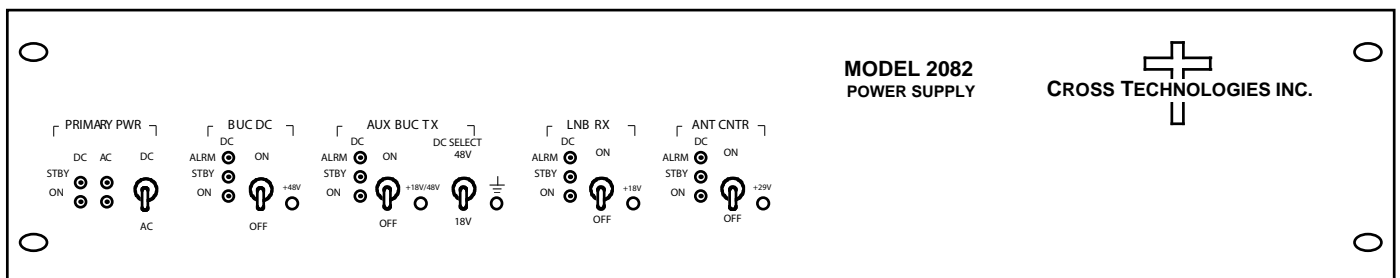

**2082-1972 Front Panel**

### EQUIPMENT SPECIFICATIONS\*

#### ----- L-Band Insertion-----

#### RF Input/Output Characteristics

Impedance/Return Loss	50Ω / 10 dB minimum
Frequency	950 - 2150 MHz and 10MHz
Insertion Loss	1 ± 0.5 dB (L-Band) 1dB max. (10 MHz)
Frequency Response	±1.0 dB, 950 - 2150 MHz; ± 0.5 dB, 36 MHz BW

#### DC Output Power Characteristics

Voltage/Current, BUC AUX	+48 VDC, 5 A, max. <b>OR</b> +18 VDC, 3 A selectable
Voltage/Current, LNB	+18 VDC, 1 A, max.
Voltage/Current, BUC	+48 VDC, 8 A, max.
Voltage/Current, <i>TracStar</i> ®	+29 VDC, 5 A, max.
Load Regulation	± 5 %

#### Primary Input Power Characteristics

Voltage/Current, DC	+19 - +72 VDC, 60A, max. 1200W
Voltage/Current, AC	<b>90-264 VAC</b> . 15A, max. 47-63 Hz, 1200W

#### Connectors

DC Input	Barrier strip
AC Input	Schurter - 6100.3300 w/cord Retention
BUC	TBD (Circular Bayonet 2-pin w/sockets)
<i>TracStar</i> ®	Refer to <i>TracStar</i> ® documentation

#### Other

RF Connectors	TNC, 50Ω (female)
(Call for other connectors)	
Size	19 inch, 1RU, 3.50" H x 12.0" D**
Power	19-72VDC, 1200W or <b>90-264 VAC</b> , 47-63 Hz, 1200W

\*10°C to 40°C; Specifications subject to change without notice

©TracStar Systems, Inc. 2010 All Rights Reserved

\*\*Does not account for connector protrusion

