



**GeosSat**  
Microwave

- Dual bands are switchable
- Low power consumption
- Higher reliability from integrated design principle
- Compact size and light weight
- Meet ETSI, FCC standards




## Low Noise Block Ka-Band Dual LO PLL AD910 (LNB)

Model: GLKAAD91010, GLKAAD91025

Section	Item	Specification
Band 1	Input (GHz)	18.20 - 19.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	17.25 @13 VDC
Band 2	Input (GHz)	19.20 - 20.20
	Output (MHz)	950 - 1950
	L.O (GHz), Switching	18.25 @18 VDC
Specifications	(Temperature condition for the parameters not specified is at 23±3°C)	
	Noise figure	1.6 dB max. (AD930(X) : 1.8dB max.)
	Conversion gain at -40 to +60°C	60 dB typ. (55dB min. 65dB max.)
	Gain flatness	5 dBp-p max.
	Gain flatness at -40 to +60°C	6 dBp-p max.
	Gain ripple at per 27MHz, -40 to +60°C	1 dBp-p max.
	L.O stability at -40 to +60°C	±10, 25 KHz max
	Image rejection	40 dBc min.
	Phase noise	-70 dBc/Hz at 1KHz
		-78 dBc/Hz at 10KHz
		-95 dBc/Hz at 100KHz
	Output P1dB	+3 dBm min
	Input VSWR	2.5 : 1 max.
	Output VSWR	2.5 : 1 max.
	Input waveguide flange	WR-42
	Output connector	F, N-type female (option)
	Power supply	+12 to +24V DC
	Required current	450 mA max.
	Operating temperature	-40 to +60°C
	Waterproof	IP 67
	Dimension (exclude connector)	60.0 x 45.0 x 103.6 mm
	Weight	420 g

# Mechanical Diagram (Unit: inch (mm))

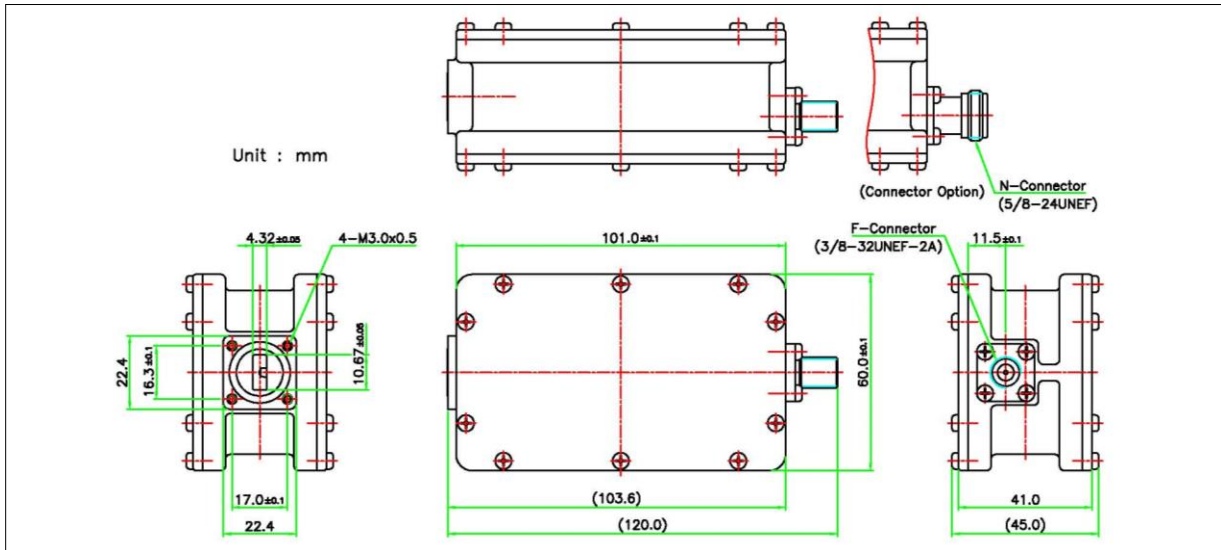

[Request A Quote](#)