

OVERVIEW

The **Q-Flex™** modem embodies a new concept in satellite modem technology - a **flexible software-defined modem** that does what you want, now and in the future.

The **Q-Flex™**'s **flexible hardware platform now provides point-to-point and point-to-multipoint operation in one unit**. The **Q-Flex™** modem is ideal for handling IP traffic but can be fitted with virtually any type of terrestrial interface and operates at up to 200Mbps.

Flexible pricing is achieved by enabling only the features you need at any time. **Future-proofing** is assured by convenient software upgrades via Ethernet or a memory stick.

Advanced Bandwidth-Efficient Features

The **Q-Flex™** modem supports the most powerful bandwidth-saving technology available.

DVB-S2X, the successor to the highly robust and bandwidth-efficient DVB-S2, is supported and includes spectral roll-offs as low as 5%.

Paired Carrier™ overlays transmit and receive carriers reducing satellite bandwidth by 50% (using ViaSat's patented PCMA technology).

FastLink™ low-latency LDPC is optimised for latency-sensitive applications while giving coding gain that is close to the theoretical limits.

Bandwidth-saving IP features include ACM, acceleration and header and payload compression.

FEATURES

- ▶ Dual IF/L-band operation
- ▶ Data rates to 200Mbps
- ▶ **XStream IP™** advanced IP optimization suite, including TCP acceleration, header & payload compression, dynamic routing, traffic shaping, encryption & ACM
- ▶ DVB-S2X, **FastLink™** LDPC & TPC
- ▶ Terrestrial interfaces include Ethernet & optical Ethernet, EIA-530, G.703 & ASI
- ▶ Optimized spectral roll-offs, including 5%
- ▶ **Paired Carrier™** carrier overlay
- ▶ **LinkGuard™** signal-under-carrier interference detection
- ▶ Built-in spectrum & constellation monitors
- ▶ DVB Carrier ID. Fully compliant with DVB-CID standard
- ▶ **New!** Multi-demod option
- ▶ **New! Q-NET™ Navigator** network M&C application included as standard
- ▶ **New!** DVB-S2X modulation up to 256APSK

Markets and Applications

- ▶ IP trunking and IP backhaul
- ▶ Corporate networking
- ▶ Mobile/G.703 backhaul
- ▶ Disaster recovery
- ▶ Maritime, oil & gas communications
- ▶ Broadcast
- ▶ Intelligence gathering

Request A Quote

Dual IF/L-Band Satellite Modem

Main Specifications	
Frequency	IF: 50 to 90MHz & 100 to 180MHz (resolution 100Hz) (BNC connector) L-band: 950 to 2150MHz (resolution 100Hz) (N-type connector)
Data Rate	Standard: 2,048kbps Options: 5Mbps, 10Mbps, 25Mbps, 60Mbps, 100Mbps and 200Mbps
Data Rate Limits	DVB-S2X (including DVB-S2): 100kbps to 200Mbps 'Low-cost DVB-S2' option: 350kbps to 132Mbps FastLink™ LDPC: 18kbps to 100Mbps TPC: 4.8kbps to 60Mbps 1bps resolution
Symbol Rate Limits	DVB-S2X (including DVB-S2): 100ksp/s to 50Msp/s 'Low-cost DVB-S2' option: 350ksp/s to 37.5Msp/s FastLink™ LDPC: 18ksp/s to 40Msp/s TPC: 9ksp/s to 40Msp/s
Operating Modes	DVB-S2X (EN 302 307-2) option DVB-S2 (EN 302 307-1) option Closed Network (+ ESC) (IESS-315) IBS/IDR (IESS-308/309/310/314) options
Scrambling	DVB-S2/DVB-S2X: As EN 302 307 IBS: As IESS-309 Closed Network + ESC: Synchronised to ESC overhead
Impedance	IF: 50Ω/75Ω; L-band: 50Ω
Return Loss	IF: >18dB; L-band: >15dB
Redundancy	1:1 through 1:16 redundancy

Traffic Interfaces	
Standard:	Gigabit Ethernet (single RJ45) for IP traffic
Options:	4-port Gigabit Ethernet switch (extends base modem Ethernet traffic port with another 3 Ethernet ports, creating 4-port switch) Optical Gigabit Ethernet/STM-1/OC-3 (Small Form-Factor pluggable module supporting all common optical standards) EIA-530 (RS422, X.21, V.35 and RS232 on 25-pin D-type female) G.703 E1/T1, E2/T2, E3/T3 (balanced on RJ45; unbalanced 75Ω BNC female) Quad E1 G.703 (balanced RJ45) Quad ASI (75Ω BNC female) Serial LVDS (25-pin D-type female) HSSI (50-pin HD SCSI-2 connector) IDR (to IESS 308; 50-way female D type connector)

Modulator	
Output Power	IF: 0 to -25dBm (0.1dB steps) L-band: 0 to -40dBm (0.1dB steps)
Output Power Stability/Accuracy	Stability: ±1.0dB, 0°C to 50°C Accuracy: ±0.375dBm
Transmit Filter Roll-off	5%, 10%, 15%, 20%, 25%, 35%
Phase Accuracy	±2° maximum
Amplitude Accuracy	±0.2dB maximum
Carrier Suppression	-30dBc minimum
Output Phase Noise	As EN 302 307, EN 300 421, IESS-308 & EN 301 210
Harmonics & Spurious	Better than -60dBc/ 4kHz in-band (at 0dBm to -30dBm output)
Transmit On/Off Ratio	-65dB minimum
BUC PSU Option	24V or 48V DC via IFL cable, 200W
BUC 10MHz Reference	Via IFL cable; 10MHz ± 0.01 ppm; 3dBm ± 3dB
FSK Control	Allows monitor & control of a compatible L-band BUC from the modem via the Tx IFL cable

Demodulator	
Input Range	IF minimum: -115 + 10 log (symbol rate) L-band minimum: -130 + 10 log (symbol rate) IF/L-band maximum: -80 + 10 log (symbol rate)
Maximum Composite	+10dBm
Wanted-to-composite	IF: -94 + 10 log (symbol rate) L-band: -102 + 10 log (symbol rate)
Frequency Sweep Width	±1kHz to ±250kHz (1kHz steps)
Acquisition Time	Dependent on FEC, data rate and sweep width
Clock Tracking Range	±100ppm minimum
Receive Spectral Roll-off	5%, 10%, 15%, 20%, 25%, 35%
LNB 10MHz Reference	Via IFL cable; 10MHz ± 0.01 ppm; 0dBm ± 3dB
LNB Voltage	Selectable 13V, 15V, 18V or 24V DC to LNB via IFL cable; maximum 0.5A

Multi-Demodulator Option	
<i>One demodulator is fitted as standard. Our demodulator add-on card supports 8 demodulators. Up to two demodulator add-on cards can optionally be fitted, supporting up to 16 demodulators in total. In point-to-point operation, the standard demodulator is used. In point-to-multipoint, the multi-demods are used.</i>	
<i>The multi-demod capability extends the flexibility of the modem, converting it into a Q-MultiFlex™ (see separate datasheet for full specification). To keep the purchase price as low as possible, the multi-demod hardware can be fitted to make the modem 'point-to-multipoint ready' and the demods can then be unlocked at a later date in software (in blocks of 4). Or the demods can be enabled from the outset.</i>	
<i>The modem's personality - Q-Flex™ or Q-MultiFlex™ - is then determined purely by which software version you load (freely downloadable from our web site). Features from one datasheet continue to be available after the modem personality has been changed, meaning features common to both datasheets need only be purchased once. Please contact us for more details</i>	

Demodulator options	4, 8, 12 or 16 (total)
Operating Mode	FastLink™ Low-latency LDPC decoder operated in Closed Network mode
Data Rate	Each inbound: 18kbps to 100Mbps Total for all inbounds combined: Up to 200Mbps 1bps resolution
Symbol Rate	Each inbound: 18ksp/s to 40Msp/s Total for all inbounds combined: Up to 70Msp/s 1sp/s resolution

ClearLinQ™ Adaptive Tx Predistorter	
Corrects for linear & non-linear distortion in the RF chain (i.e. amplifier and transponder). Applicable to all FECs and modulations. Maximises amplifier linear output power; minimises required back-off. Up to 2dB performance gain	

DVB-S2X Rx Adaptive Equaliser	
Corrects for slope on the carrier and group delay (typically found at transponder edges, causing inter-symbol interference). The 9-tap Rx equaliser is provided as standard; automatically switched on above 10Msp/s	

DVB Carrier ID Option (ETSI TS 103 129)	
Supports the identification of interfering carriers. Allows identification of individual modem carriers by superimposing a low-power CID waveform onto the carrier with negligible degradation. The CID waveform contains a unique Carrier ID and other identity information. A carrier monitoring system is required to decode CID waveforms	

Paired Carrier™ Option	
Paired Carrier™ (30kHz to 54MHz occupied bandwidth)	Transmit and receive carriers are overlaid in the same space segment. Echo cancellation techniques are used to cancel the unwanted transmit carrier leaving the wanted receive carrier
Paired Carrier™ data rate options	256kbps, 512kbps, 1024kbps, 2.5Mbps, 5Mbps, 10Mbps, 15Mbps, 20Mbps, 25Mbps, 30Mbps, 40Mbps, 50Mbps, 60Mbps, 80Mbps, 100Mbps and 200Mbps traffic rate
Power Asymmetry	-10dB to +10dB
Symbol Rate Asymmetry	Up to 12:1
Eb/No Degradation	Typically 0.1dB to 0.5dB; up to 0.7dB for 16QAM/16APSK; up to 1dB for 32APSK
Mobile Operation	Uses GPS data to continually recalculate position relative to satellite, allowing uninterrupted operation in mobile environments anywhere in satellite footprint

Test Facilities and Alarm Outputs	
BER Tester	Bit error rate tester operates over main traffic or ESC channel, allowing BER monitoring while on traffic. Not available in DVB-S2/S2X modes. Supports various test patterns compatible with common BER testers
Other test modes	Transmit CW Transmit alternate 1-0 pattern Simulated satellite delay for TCP/IP packets
Alarm Relays	4 independent Form C relays for unit, Tx, Rx and deferred alarms



Mechanical/Environmental	
Size	1U chassis, 410mm deep excluding front panel handles and rear panel connectors and fans
Weight	3.5kg
Power Supply	90 to 264VAC, 1A @ 100V, 0.5A @ 240V, 47 to 63Hz Fused IEC connector (live and neutral fused); 24V and 48V DC options
Compliances	FCC, CE and RoHS compliant
Safety Standards	EN60950-1:2006
Emissions & Immunity	Emissions: EN55022:2010 Class B Immunity: EN55024:2010
Operating Temperature	Standard: 0 to 50°C (storage: -40°C to 70°C) Extended: 0 to 55°C when fitted with Ruggedisation option
Humidity	95% relative humidity, non-condensing

Ethernet: Standard Features	
Bridging and Static Routing	Trunking mode: Hardware Layer 2 bridge supporting 200Mbps bi-directional traffic at up to 500,000 packets per second; zero jitter Layer 2 bridge & Layer 3 router: Software processing capability of up to 150,000 packets per second
IPv4/IPv6	Dual IPv4/IPv6 TCP/IP supporting IPv4/IPv6 bridging and routing
VLAN Support	IEEE 802.1q VLAN support IEEE 802.1p packet prioritisation using strict priority or fair weighting queuing
DHCP	DHCP client for automatic allocation of M&C IP address; DHCP server allocates IP addresses to network devices
NAT	NAT firewall; allows all network devices to share a single IP address when viewed from other end of satellite link
SNMP	SNMP v1, v2c & v3
Access Control Lists	Separate IP and MAC address black/white user access control lists
Network Protocol (NTP)	NTP client synchronises modem time & date to NTP server; provides millisecond accuracy
IEEE 1588 V2 Precision Time Protocol (PTP)	PTP hardware implementation with nanosecond-resolution timestamping provides sub-microsecond accurate clock synchronisation; modem implements a PTP boundary clock, operating in both master & slave modes
Web Server	Modem web server M&C interface
AAA RADIUS Secure User Login	Authentication, Authorisation & Accounting. Greater access control & accountability. Replaces standard modem login with user's personal network login credentials
IP Metrics	Tx, Rx throughput (bps, pps) graphs; dropped, errored packet counts
sFlow Performance Metrics	sFlow is the industry standard for network monitoring, giving full modem performance visibility to sFlow compatible network management devices
Packet Generator/Analyser	Generates & analyses TCP & UDP packet streams, allowing modem-to-modem IP testing without any PCs
Ethernet MTU Size	Standard: 10k bytes Optical Ethernet: 16k bytes


Ethernet: XStream IP™ Option	
<i>XStream IP™ is an integrated set of IP optimization and traffic management features designed for maximum reliability and bandwidth efficiency. The maximum throughput depends on features enabled & traffic format</i>	
Traffic Shaping	Provides guaranteed throughput for priority traffic; supports Committed and Burst Information Rates. Stream classification by VLAN ID, IP address, IEEE 802.1p priority, DiffServ DSCP, PID & MPLS EXP
Header Compression	Robust Header Compression (RFC 3095). Reduces Ethernet/IP/UDP/TCP/RTP header sizes typically by 90%. 1-way packet processing limit: 60,000 pps; 2-way limit: 45,000 pps. Includes Ethernet header compression (compresses 14-byte Ethernet frame to typically one byte)
Payload Compression	Uses Deflate algorithm (RFC 1951) to compress TCP & UDP packets; typical payload compression of 50%
Dynamic Routing	RIP V1, V2; OSPF V2, V3; BGP V4
TCP Acceleration	Typical throughput level of 90% of link capacity. Supports 10,000 concurrent accelerated TCP connections (plus at least 40,000 unaccelerated TCP connections) up to 100Mbps
HTTP Acceleration	Speeds up download of web pages to web browsers; includes DNS caching
AES-256 Encryption	<i>Supported on Q-Flex™ model only. See separate Q-Flex™ datasheet</i>

Ethernet: XStream IP™ DVB-S2	
<i>Features that are provided as standard as part of DVB-S2 & DVB-S2X are: ACM, VCM and IP-over-DVB Encapsulation. Note that GSE is a separate option</i>	
ACM	Dynamically varies modcod with varying link conditions, maximises throughput at all times by converting unused link margin into additional throughput; 100% link availability
VCM	Supports transmission/reception of two ASI streams or, one ASI stream with one IP stream, each with its own modcod for optimal throughput
IP-over-DVB Encapsulation	Supports the transmission of IP packets with/without Ethernet frames over DVB-S2/S2X; encapsulates & decapsulates using MPE (EN 301 192), ULE (RFC 4326) or Paradise XStream Encapsulation (PXE)
GSE Encapsulation	Highly efficient encapsulation of IP packets or Ethernet frames; compatible with EN 302 307-2 standard, for use with DVB-S2 and DVB-S2X

Network Control	
<i>Web browser user interface support is provided as standard. SNMP and command line interfaces support the development of third-party user interfaces. In addition, the following network control application options are available</i>	
Q-NET™ Navigator	Allows all modems and third-party network devices to be fully controlled through a single application. It provides an easy-to-navigate site map, summary status reporting, etc. Provided as standard, free of charge
Q-NET™ Bandwidth Manager	Provides multi-satellite/transponder carrier planning and high-level system control, monitoring, recording and quality-of-service reporting

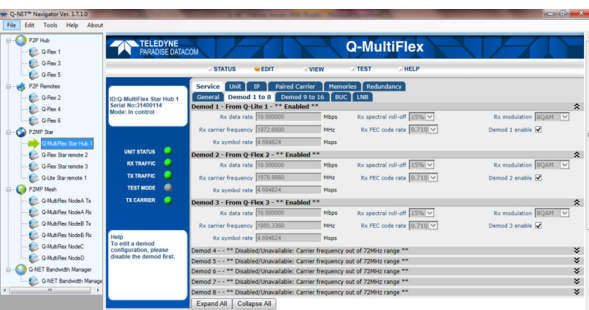

Q-NET™ Navigator supports the M&C of all Paradise modems (old and new) and third-party network devices from a single application. Includes easy-to-use navigation, support for multiple operator roles/access levels, continuous status/ alarm polling and full access to all modem features. **Q-NET™ Navigator** is included as standard, free of charge.

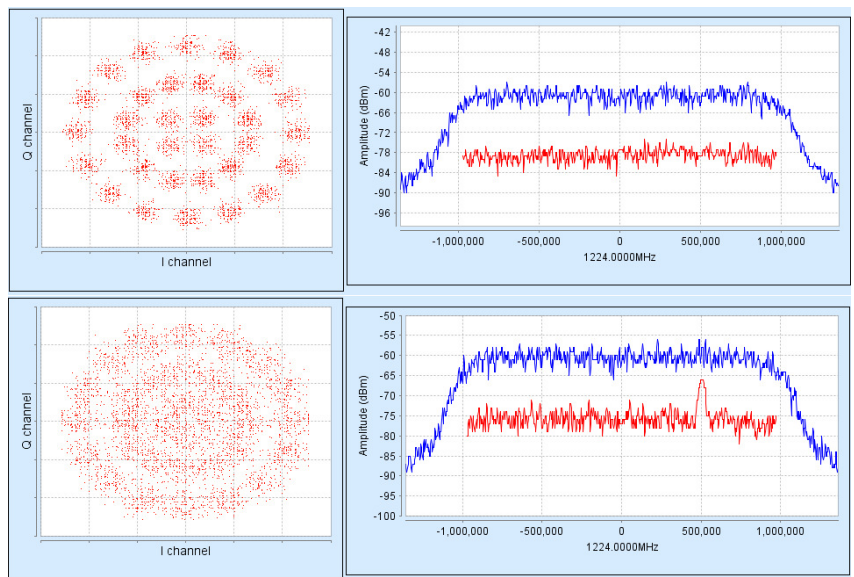

Built-in Spectrum Analyser showing **LinkGuard™** Signal-Under-Carrier interference detection without/with interferer present.



Forward Error Correction

DVB-S2X (EN 302 307-2)	<p>Normal Frame: QPSK 13/45, 9/20, 11/20 8PSK 23/36, 25/36, 13/18 8APSK-L 5/9, 26/45 16APSK-L 5/9, 8/15, 1/2, 3/5, 2/3 32APSK 32/45, 11/15, 7/9 32APSK-L 2/3 64APSK 11/15, 7/9, 4/5, 5/6 64APSK-L 32/45</p> <p>Short Frame: QPSK 11/45, 4/15, 14/45, 7/15, 8/15, 32/45 8PSK 7/15, 8/15, 26/45, 32/45 16APSK 7/15, 8/15, 26/45, 3/5, 32/45 32APSK 2/3, 32/45</p>
DVB-S2X Advanced Modulation	<p>Normal Frame: 128APSK 3/4, 7/9 256APSK 32/45, 3/4 256APSK-L 29/45, 2/3, 31/45, 11/15</p>
DVB-S2X Low-latency Mode	<p>Very Short Frame: (Frame size of 5,400 bits, reducing latency to 33% of standard DVB-S2 Short frame) QPSK 1/5, 4/15, 1/3, 2/5, 7/15, 8/15, 3/5, 2/3, 11/15, 12/15 8PSK 11/15, 12/15 16APSK 12/15</p> <p>Ultra Short Frame: (Frame size of 3,240 bits, reducing latency to 20% of standard DVB-S2 Short frame) QPSK 2/9, 1/3, 4/9, 5/9, 2/3, 7/9 8PSK 2/3, 7/9 16APSK 2/3, 7/9 32APSK 7/9 64APSK 7/9</p>
DVB-S2 (EN 302 307-1)	<p>QPSK 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK 3/4, 4/5, 5/6, 8/9, 9/10</p>
FastLink™ Low-Latency LDPC	<p>BPSK 0.499 (O)QPSK 0.532, 0.639, 0.710, 0.798 8PSK/8QAM 0.639, 0.710, 0.778 16APSK/16QAM 0.726, 0.778, 0.828, 0.851 32APSK 0.778, 0.828, 0.886, 0.938 64QAM 0.828, 0.886, 0.938, 0.960</p>
TPC	<p>BPSK 5/16, 21/44, 3/4, 7/8 (O)QPSK 5/16, 21/44, 3/4, 7/8, 0.93 8PSK 3/4, 7/8, 0.93 8QAM 3/4, 7/8, 0.93 16QAM 3/4, 7/8, 0.93</p>

Legacy Forward Error Correction

DVB-S/DSNG (Provided as standard with Quad ASI card)	<p>DVB-S: QPSK 1/2, 2/3, 3/4, 5/6, 7/8 DVB-DSNG: 8PSK 2/3, 5/6, 8/9; 16QAM 3/4, 7/8 (ETSI EN 300421/ 301210 compliant)</p>
Legacy FEC Option	<p>Viterbi: BPSK/(O)QPSK 1/2, 3/4, 7/8 TCM: 8PSK 2/3 Sequential: BPSK/(O)QPSK 1/2, 3/4, 7/8 Reed-Solomon outer codec for Viterbi, TCM & Sequential</p>

TPC Performance
Eb/No (dB) at BER 5E-8

	Rate 1/2	Rate 3/4	Rate 7/8	Rate 0.93
BPSK, (O)QPSK	3.0	4.2	4.2	6.5
8PSK		6.3	6.8	9.6
8QAM		6.7	6.8	10.1
16QAM		7.6	7.9	10.4

DVB-S/DSNG Performance
Eb/No (dB) at QEF

	Rate 1/2	Rate 2/3	Rate 3/4	Rate 5/6	Rate 7/8	Rate 8/9
QPSK	3.9	4.6	4.0	4.6	5.3	
8PSK		6.9		8.9		9.4
16QAM			9.0		10.7	

DVB-S2 Performance
QEF (PER 10e-7)
Normal frames, Pilots off

	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 1/4	0.490243	1.1 (-2.0)
QPSK 1/3	0.656448	0.7 (-1.1)
QPSK 2/5	0.789412	0.7 (-0.3)
QPSK 1/2	0.988858	1.1 (1.1)
QPSK 3/5	1.188304	1.7 (2.4)
QPSK 2/3	1.322253	2.0 (3.2)
QPSK 3/4	1.487473	2.4 (4.1)
QPSK 4/5	1.587196	2.6 (4.6)
QPSK 5/6	1.654663	3.0 (5.2)
QPSK 8/9	1.766451	3.7 (6.2)
QPSK 9/10	1.788612	3.9 (6.4)
8PSK 3/5	1.779991	3.5 (6.0)
8PSK 2/3	1.980636	4.0 (7.0)
8PSK 3/4	2.228124	4.6 (8.1)
8PSK 5/6	2.478562	5.6 (9.5)
8PSK 8/9	2.646012	6.6 (10.8)
8PSK 9/10	2.679207	6.9 (11.2)
16APSK 2/3	2.637201	5.2 (9.4)
16APSK 3/4	2.966728	5.8 (10.5)
16APSK 4/5	3.165623	6.2 (11.2)
16APSK 5/6	3.300184	6.6 (11.8)
16APSK 8/9	3.523143	7.5 (13.0)
16APSK 9/10	3.567342	7.8 (13.3)
32APSK 3/4	3.703295	7.3 (13.0)
32APSK 4/5	3.951571	7.8 (13.8)
32APSK 5/6	4.119540	8.4 (14.5)
32APSK 8/9	4.397854	9.4 (15.8)
32APSK 9/10	4.453027	9.6 (16.1)

DVB-S2X Performance
QEF (PER 10e-7)
Normal frames, Pilots off

	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 13/45	0.567805	0.5 (-2.0)
QPSK 9/20	0.889135	0.9 (0.4)
QPSK 11/20	1.088581	1.1 (1.5)
8APSK-L 5/9	1.647211	3.1 (5.3)
8APSK-L 26/45	1.713601	3.2 (5.5)
8PSK 23/36	1.896173	3.6 (6.4)
8PSK 25/36	2.062148	4.1 (7.2)
8PSK 13/18	2.145136	4.3 (7.6)
16APSK-L 1/2	1.972253	3.4 (6.3)
16APSK-L 8/15	2.104850	3.5 (6.7)
16APSK-L 5/9	2.193247	3.6 (7.0)
16APSK-L 3/5	2.370043	3.9 (7.6)
16APSK-L 2/3	2.635236	4.4 (8.6)
16APSK 26/45	2.281645	4.2 (7.8)
16APSK 3/5	2.370043	4.4 (8.1)
16APSK 28/45	2.458441	4.2 (8.1)
16APSK 23/36	2.524739	4.6 (8.6)
16APSK 25/36	2.745734	5.2 (9.6)
16APSK 13/18	2.856231	5.4 (10.0)
16APSK 7/9	3.077225	6.0 (10.9)
16APSK 77/90	3.386618	7.0 (12.3)
32APSK-L 2/3	3.289502	6.5 (11.7)
32APSK 32/45	3.510192	6.5 (12.0)
32APSK 11/15	3.620536	6.7 (12.3)
32APSK 7/9	3.841226	7.5 (13.3)
64APSK-L 32/45	4.206428	8.4 (14.6)
64APSK 11/15	4.338659	8.9 (15.3)
64APSK 7/9	4.603122	9.3 (15.9)
64APSK 4/5	4.735354	9.5 (16.3)
64APSK 5/6	4.933701	10.3 (17.2)

DVB-S2 Performance
QEF (PER 10e-7)
Short frames, Pilots off

	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 1/4	0.365324	2.2 (-2.2)
QPSK 1/3	0.629600	1.3 (-0.7)
QPSK 2/5	0.760928	1.1 (-0.1)
QPSK 1/2	0.848840	1.6 (0.9)
QPSK 3/5	1.156532	2.1 (2.7)
QPSK 2/3	1.288400	2.3 (3.4)
QPSK 3/4	1.420269	2.9 (4.4)
QPSK 4/5	1.508181	3.1 (4.9)
QPSK 5/6	1.596093	3.5 (5.5)
QPSK 8/9	1.727961	4.0 (6.4)
8PSK 3/5	1.725319	4.0 (6.4)
8PSK 2/3	1.922040	4.5 (7.3)
8PSK 3/4	2.118761	5.1 (8.4)
8PSK 5/6	2.381056	6.0 (9.8)
8PSK 8/9	2.577777	7.0 (11.1)
16APSK 2/3	2.548792	5.6 (9.7)
16APSK 3/4	2.809662	6.2 (10.7)
16APSK 4/5	2.983575	6.7 (11.4)
16APSK 5/6	3.157488	7.1 (12.1)
16APSK 8/9	3.418357	8.1 (13.4)
32APSK 3/4	3.493093	8.1 (13.5)
32APSK 4/5	3.709309	8.7 (14.4)
32APSK 5/6	3.925526	9.0 (14.9)
32APSK 8/9	4.249850	10.2 (16.5)


DVB-S2X Performance
QEF (PER 10e-7)
Short frames, Pilots off

	Spectral Efficiency	Eb/No (dB) & Es/No (dB)
QPSK 11/45	0.453236	1.4 (-2.0)
QPSK 4/15	0.497192	1.3 (-1.7)
QPSK 14/45	0.585104	1.1 (-1.2)
QPSK 7/15	0.892796	1.4 (0.9)
QPSK 8/15	1.024664	1.7 (1.8)
QPSK 32/45	1.376313	2.6 (4.0)
8PSK 7/15	1.331876	3.1 (4.3)
8PSK 8/15	1.528597	3.4 (5.2)
8PSK 26/45	1.659745	3.8 (6.0)
8PSK 32/45	2.053188	4.8 (7.9)
16APSK 7/15	1.766184	4.0 (6.5)
16APSK 8/15	2.027053	4.4 (7.5)
16APSK 26/45	2.200966	4.8 (8.2)
16APSK 3/5	2.287923	5.0 (8.6)
16APSK 32/45	2.722705	5.8 (10.2)
32APSK 2/3	3.168769	6.8 (11.8)
32APSK 32/45	3.384985	7.3 (12.6)

FastLink™ Performance at BER 5E-8

(Note: * denotes BER of 5E-12)

	FEC Rate	Low BER Eb/No & Es/No	Balanced Eb/No & Es/No	Low Latency Eb/No & Es/No
BPSK	0.499	2.1 (-0.9)	2.9 (-0.1)	3.4 (0.4)
(O)QPSK	0.532	2.1 (2.4)	2.6 (2.9)	2.9 (3.2)
(O)QPSK	0.639	2.4 (3.5)	2.8 (3.8)	3.2 (4.3)
(O)QPSK	0.710	2.7 (4.2)	3.2 (4.7)	3.7 (5.2)
(O)QPSK	0.798	3.1 (5.1)	3.9 (6.0)	4.2 (6.2)
8PSK	0.639	5.4* (8.2)	5.9* (8.7)	6.3* (9.1)
8PSK	0.710	5.6* (8.9)	5.5 (8.8)	5.8 (9.1)
8PSK	0.778	5.6 (9.3)	6.1 (9.7)	6.4 (10.1)
8QAM	0.639	4.4 (7.2)	4.8 (7.6)	5.0 (7.8)
8QAM	0.710	5.0 (8.3)	5.3 (8.6)	5.5 (8.8)
8QAM	0.778	5.5 (9.2)	5.9 (9.6)	6.1 (9.8)
16APSK	0.726	7.6* (12.2)	7.5* (12.1)	7.5 (12.1)
16APSK	0.778	7.8* (12.7)	7.1 (12.0)	7.5 (12.4)
16APSK	0.828	7.4 (12.6)	8.1 (13.3)	8.4 (13.6)
16APSK	0.851	7.9 (13.2)	8.3 (13.6)	8.8 (14.1)
16QAM	0.726	7.2* (11.8)	6.6 (11.2)	6.8 (11.4)
16QAM	0.778	6.7 (11.6)	7.1 (12.0)	7.4 (12.3)
16QAM	0.828	7.2 (12.4)	7.7 (12.9)	8.0 (13.2)
16QAM	0.851	7.5 (12.8)	8.0 (13.3)	8.4 (13.7)
32APSK	0.778	9.8* (15.7)	9.6 (15.5)	10.0 (15.9)
32APSK	0.828	9.8 (16.0)	10.6 (16.8)	10.9 (17.1)
32APSK	0.886	10.8 (17.3)	11.4 (17.9)	11.9 (18.4)
32APSK	0.938	12.6 (19.3)	13.2 (19.9)	13.9 (20.6)

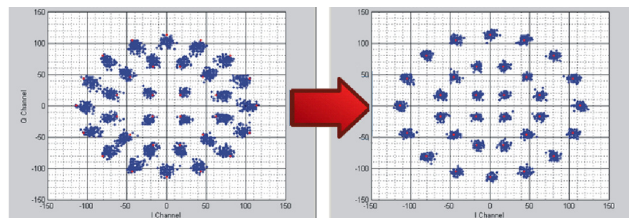

'Before and after' constellations showing ClearLinQ™ Adaptive Tx Predistorter compensating for severe non-linear signal distortion to a 32APSK carrier

Option	Description
	Fully configurable - pay only for what you need!
Base Modem	<p>✓ 4.8kbps to 2.048Mbps Closed Network (+ ESC) modem with two Gigabit Ethernet RJ45s for M&C and traffic respectively; Ethernet bridge, static routing and all features described under Ethernet Standard Features</p> <p>IF operation 50 to 90MHz & 100 to 180MHz</p> <p>L-band operation 950 to 2150MHz; high-stability 10MHz reference; FSK</p> <p>TPC: BPSK, QPSK, OQPSK, 8PSK, 8QAM and 16QAM; to 60Mbps subject to prevailing modem data rate</p> <p>LinkGuard™: Signal-under-carrier interference detection web spectrum graph showing received spectrum and any interference underneath the received carrier while on traffic; automated alarm when interference rises above user-set threshold; supported for all FECs except for 'Low-cost DVB-S2' option</p> <p>AUPC: Automatic Uplink Power Control</p> <p>Web browser monitoring tools: Spectrum display, constellation monitor, TCP/IP throughput</p> <p>Internal Bit Error Rate Tester (BERT): For non-DVB-S2/DVB-S2X operation only</p> <p>TCP/IP Packet Generator/Analyser: Generates and analyses TCP & UDP packet streams, allowing modem-to-modem IP testing without any other equipment</p> <p>IEEE 1588 V2 Precision Time Protocol and Network Time Protocol</p>
Tx-only	Transmit functions only
Rx-only	Receive functions only
Data Rate	<p>5Mbps data rate: Extends base operation to 5Mbps</p> <p>10Mbps data rate: Extends 5Mbps operation to 10Mbps</p> <p>25Mbps data rate: Extends 10Mbps operation to 25Mbps</p> <p>60Mbps data rate: Extends 25Mbps operation to 60Mbps</p> <p>100Mbps data rate: Extends 60Mbps operation to 100Mbps (FastLink™, DVB-S2 & DVB-S2X only)</p> <p>200Mbps data rate: Extends 100Mbps operation to 200Mbps (DVB-S2 & DVB-S2X only)</p>
XStream IP™	<p>Traffic Shaping: Supports CIR/BIR/priority settings for IP streams classified by VLAN ID, IP address, Diffserv class, IEEE 802.1p priority, MPLS EXP field & MPEG2 transport stream PID</p> <p>Header Compression: IP/UDP/TCP/RTP packet header compression (RFC 3095) plus Ethernet header compression</p> <p>Payload Compression: TCP/UDP packet payload compression using the Deflate algorithm (RFC 1951)</p> <p>Dynamic Routing: RIP, OSPF and BGP</p> <p>TCP Acceleration: Up to 10,000 concurrent accelerated TCP connections to 100Mbps subject to prevailing data rate</p> <p>HTTP Acceleration: Speeds up download of web pages to web browsers; includes DNS caching; <i>requires TCP acceleration to be on and the modem to be in routing mode</i></p> <p>AES-256 Encryption: <i>Please note that AES-256 Encryption (TCP/IP packet payload encryption using AES with 256-bit keys) is supported on the Q-FlexE model only. The Q-FlexE is identical to the standard Q-Flex in every other respect</i></p>
XStream IP™ DVB-S2 <i>Provided as standard as part of DVB-S2 & DVB-S2X options</i>	<p>IP-over-DVB Encapsulation: Encapsulation of IP packets and Ethernet frames over DVB-S2 using Paradise XStream Protocol (PXE), MPE or ULE</p> <p>ACM: DVB-S2/DVB-S2X ACM (dynamic adjustment of outbound modcod to maximize data rate)</p> <p>VCM: Allows either two ASI streams, or one ASI stream and one IP stream, to be multiplexed onto a single carrier; requires Quad ASI hardware option</p>
XStream IP™ DVB-S2 GSE Encapsulation	Highly efficient encapsulation of IP packets or Ethernet frames; compatible with EN 302 307-2 standard, for use with DVB-S2 and DVB-S2X
DVB-S2X <i>To 200Mbps subject to prevailing modem data rate limits</i>	<p>DVB-S2/S2X CCM Tx: DVB-S2 QPSK, 8PSK, 16APSK & 32APSK Tx operation per EN 302 307-1. DVB-S2X QPSK, 8PSK, 8APSK, 16APSK, 32APSK & 64APSK Tx operation per EN 302 307-2. Includes 5%, 10%, 15%, 20%, 25% & 35% spectral roll-offs. Includes XStream IP™ DVB-S2, which comprises ACM, VCM and IP-over-DVB encapsulation</p> <p>DVB-S2/S2X CCM Rx: Add-on card (P3609) supporting DVB-S2 QPSK, 8PSK, 16APSK & 32APSK Rx operation per EN 302 307-1. DVB-S2X QPSK, 8PSK, 8APSK, 16APSK, 32APSK & 64APSK Rx operation per EN 302 307-2. Includes 5%, 10%, 15%, 20%, 25% & 35% spectral roll-offs. Includes XStream IP™ DVB-S2, which comprises ACM, VCM and IP-over-DVB decapsulation</p>
DVB-S2 <i>Low-cost DVB-S2 option; to 132Mbps subject to modem data rate limits</i>	<p>DVB-S2 CCM Tx: DVB-S2 QPSK, 8PSK & 16APSK Tx operation per EN 302 307-1. Includes 15%, 20%, 25% & 35% spectral roll-offs. Includes XStream IP™ DVB-S2, which comprises ACM, VCM and IP-over-DVB encapsulation</p> <p>DVB-S2 CCM Rx: Add-on card (P3604) supporting DVB-S2 QPSK, 8PSK & 16APSK Rx operation per EN 302 307-1. Includes 15%, 20%, 25% & 35% spectral roll-offs. Includes XStream IP™ DVB-S2, which comprises ACM, VCM and IP-over-DVB decapsulation. <i>Please note that this add-on card is physically different to the DVB-S2X add-on card</i></p>
DVB-S2X Low-latency Mode <i>Proprietary extension to DVB-S2X</i>	<p>Very Short Frame: Frame size of 5,400 bits, reducing latency to 33% of standard DVB-S2 Short frame; supports QPSK/8PSK/16APSK</p> <p>Ultra Short Frame: Frame size of 3,240 bits, reducing latency to 20% of standard DVB-S2 Short frame; supports QPSK/8PSK/16APSK/32APSK/64APSK</p>
DVB-S2X Advanced Modulation	128APSK, 256APSK, 256APSK-L <i>Note: available as a modulator option only</i>
FastLink™ Low-latency LDPC	Add-on card (P3605); includes BPSK, QPSK, OQPSK, 8PSK, 8QAM, 16APSK, 16QAM, 32APSK & 64QAM; to 100Mbps subject to prevailing modem data rate limits; includes 20%, 25% & 35% spectral roll-offs as standard

Option	Description
Fully configurable - pay only for what you need!	
Paired Carrier™ <i>Subject to prevailing modem data rate limits.</i> <i>Occupied bandwidth: minimum 30kHz; maximum 54MHz</i> <i>Note that Paired Carrier™ is also available as a low-cost 90-day per annum license for redundancy system standby modems - please contact Sales for details</i>	Paired Carrier™ add-on card P3607 (requires one or more options below)
	Paired Carrier™ up to 256kbps (requires Paired Carrier™ add-on card)
	Extends Paired Carrier™ up to 512kbps
	Extends Paired Carrier™ up to 1.024Mbps
	Extends Paired Carrier™ up to 2.5Mbps
	Extends Paired Carrier™ up to 5Mbps
	Extends Paired Carrier™ up to 10Mbps
	Extends Paired Carrier™ up to 15Mbps
	Extends Paired Carrier™ up to 20Mbps
	Extends Paired Carrier™ up to 25Mbps
	Extends Paired Carrier™ up to 30Mbps
	Extends Paired Carrier™ up to 40Mbps
	Extends Paired Carrier™ up to 50Mbps
	Extends Paired Carrier™ up to 60Mbps
	Extends Paired Carrier™ up to 80Mbps
Extends Paired Carrier™ up to 100Mbps	
Extends Paired Carrier™ up to 200Mbps	
Terrestrial Interfaces <i>(Please choose up to four hardware options)</i>	4-port Gigabit Ethernet Switch: Extends base modem Ethernet traffic port with 3 Ethernet ports, creating 4-port switch
	Optical Gigabit Ethernet/STM-1/OC-3: Small Form-factor Pluggable module; supports single-mode & multi-mode fibre & all wavelengths; supports all standard fibre connector types such as SC & LC (subject to provision of suitable mating socket for SFP cage)
	G.703: Provides unbalanced G.703 on 2xBNC 75Ω sockets & balanced G.703 on RJ45; includes G.703 clock extension, which provides a high-stability reference clock over satellite (alternative to GPS); includes Drop & Insert; supports E1, T1, E2, T2, E3 & T3
	EIA-530: D25 DCE supporting RS422/X.21/V.35/RS232
	Quad E1: Balanced G.703 on 4xRJ45; all 4 ports support Drop & Insert and are enabled as standard; IBS satellite framing enabled as standard; MultiMux enabled as standard, allows 2 E1s + 2Mbps IP + 2Mbps EIA-530, or 3 E1s + IP or EIA-530 (but not both), or 2 E1s + 4Mbps IP, or E1 + 2 x EIA-530, or up to 30Mbps IP + EIA-530, or IP + E3 (subject to relevant interfaces being fitted)
	Quad ASI: 4xBNC 75Ω sockets; includes DVB-S/DSNG FEC (which can be used with all terrestrial interfaces)
	Serial LVDS: On 25-way D-type connector
	HSSI: On HD50 50-way SCSI-2 connector
	IDR: To IESS-308; 50-way female D-type connector; includes Advanced AUX (variable rate synchronous Aux channel; includes option to replace IDR audio channels with serial data); includes Audio option (for IBS carriers this allows 2 x audio in 64kbps or 2 x audio+64kbps data in 128kbps - requires IBS option)
	Multi-demodulator <i>Demods can be enabled in software at time of original hardware purchase or later, as required</i>
Optimised Spectral Roll-off	Extends the standard 35%, 25% and 20% roll-off factors to include 5%, 10% and 15% roll-offs for FastLink™, TPC & legacy FECs including DVB-S
ClearLinQ™	Adaptive Tx Predistorter: Corrects for linear & non-linear distortion in the RF chain (amplifier & transponder). Applicable to all FECs and modulations including DVB-S2X, FastLink™ & TPC
Ruggedisation	Ruggedises the modem for harsh environments (fans with higher airflow, heatsinks on key components, etc.)
DVB-CID	DVB Carrier ID: Tx carrier identification per ETSI 103 129
IBS	Satellite framing to IESS 309 with low-rate Intelsat ESC (to IESS 403) and high-rate IBS ESC
Legacy FEC	Sequential FEC (limited to 2.048Mbps); TCM 8PSK 2/3 to IESS 310; Viterbi BPSK/QPSK/OQPSK FEC rates 1/2, 3/4 & 7/8; Intelsat Reed-Solomon outer codec
24V DC Input	K3023 24V DC primary power input (in place of 100 to 240V AC input)
48V DC Input	K3018 48V DC primary power input (in place of 100 to 240V AC input)
24V 200W BUC PSU	P3543 AC input, 24V 200W DC to Tx BUC
48V 200W BUC PSU	P3544 AC input, 48V 200W DC to Tx BUC
48V In & 24V BUC PSU	P3545 Floating 48V DC input; +24V 200W DC to Tx BUC
48V In & 48V BUC PSU	P3546 Floating 48V DC input; +48V 200W DC to Tx BUC
+48V In & 48V BUC PSU	P3547 +48V DC input; +48V 200W DC to Tx BUC

Teledyne Paradise Datacom reserves the right to change specifications of products described in this document at any time without notice and without obligation to notify any person of such changes. Refer to the website or contact Sales or Customer Support for the latest product information. The information contained herein is classified EAR99 under the U.S. Export Administration Regulations. The modem itself is classified ECCN 5A991.b.4 and is subject to U.S. Department of Commerce export control. Export re-export or diversion contrary to U.S. law is prohibited.